

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
15 February 2001 (15.02.2001)

PCT

(10) International Publication Number
WO 01/10372 A1

- (51) International Patent Classification⁷: **A61F 13/15**
- (21) International Application Number: **PCT/US00/19932**
- (22) International Filing Date: **21 July 2000 (21.07.2000)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/370,439 **9 August 1999 (09.08.1999)** **US**
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).
- (72) Inventors: **DATTA, Paul, Joseph**; N2005 Mayflower Drive, Appleton, WI 54915 (US). **RICHARDSON, Kathy, GERALYN**; W3050 Pinewood Court, Appleton, WI 54915 (US). **WATERHOUSE, Sirlei, Auler**; 8307 Turtlecreek Lane, Cincinnati, OH 45242 (US). **KRESSNER, Bernhardt, Edward**; 525 North Bateman Street, Appleton, WI 54911 (US).
- (74) Agents: **CONNELLY, Thomas, J. et al.**; Kimberly-Clark Worldwide, Inc., 401 N. Lake Street, Neenah, WI 54956 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *With international search report.*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **ELASTICIZED ABSORBENT PAD**

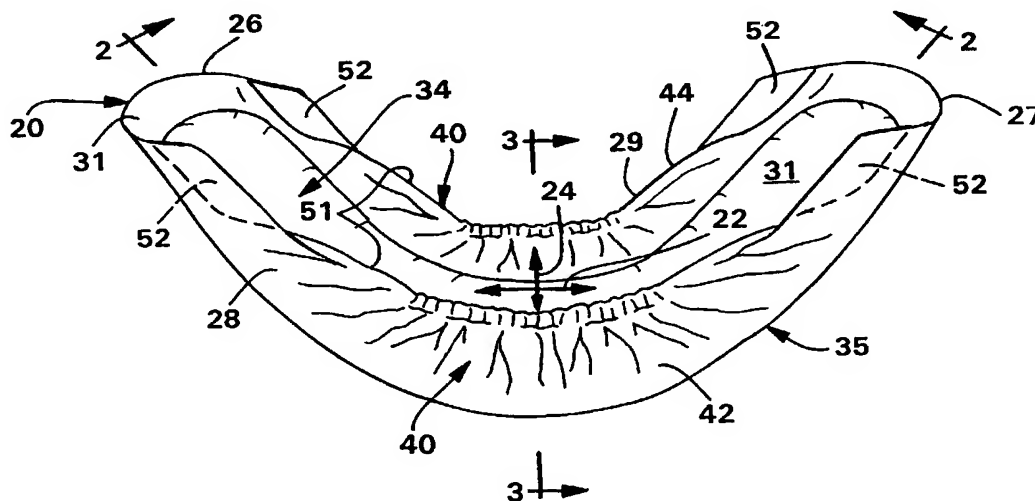

(57) Abstract: An absorbent pad having elasticized side flaps is adapted to provide improved leakage performance and comfort. In one embodiment, the elastic member of each side flap is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position, and the absorbent pad has a Gurley stiffness of greater than 2000 milligrams. In another embodiment, the absorbent pad has an anti-roll back feature and an Effective Elastic Value of at least 30 millimeters.

ELASTICIZED ABSORBENT PAD

Background of the Invention

5 The present invention relates to disposable absorbent articles. More particularly, the invention pertains to elasticized absorbent pads that are adapted to assume and maintain an effective bucket shape during use.

10 Absorbent pads for menstruation or urinary incontinence are intended to absorb and retain body fluids. Such pads typically comprise an absorbent structure disposed between a fluid (or liquid) permeable topsheet and a fluid (or liquid) impermeable backsheet. Leakage to the side has been a problem when using absorbent pads. This has been a problem in all types of absorbent pads, both the older types, i.e. thick and wide pads, and in more modern types, e.g. so-called body-shaped pads, which vary in thickness along their lengths and are relatively narrow in the mid-section where the pads are thickest.

15 The older uniformly thick pads are often greatly deformed during use quite simply because the pads are too large and not fitted to the shape of the human body. Such pads are not resilient and deform with the movement of the wearer's body. The pads usually press together in the mid-section and bend along a longitudinal axis such that the garment-facing side folds back onto itself and the body-facing surface becomes convex with portions of the topsheet layer facing out toward the sides of the pads, resulting in a reduction in effective fluid-retention. Leakage results from the folding and shifting movement of the pad.

25 Attempts to solve these problems have resulted in pads having shapes that follow the shape of the body and having the greatest absorption capacity where the need is greatest. These modern pads do not deform especially much during use and are typically more comfortable. However, side leakage is still a substantial problem even in the body-shaped pads. On occasions when fluid discharge is great, not all the fluid is absorbed rapidly enough, rather, a portion of the fluid can leak out to the sides of the pad.

30 More recent developments have resulted in thinner pads. This has been made possible both by compressing the absorbent material, and by using high-absorbent materials. However, side leakage is still a problem as such pads do not conform to the

body. Since the pads are usually very thin, the pads must be relatively broad even in the middle, making the pads liable to be greatly deformed during use, unfortunately often resulting in side leakage.

5 Many pads leak when an insult of fluid escapes off the side edges of the pad before the fluid can be absorbed. This leakage is more likely to occur after multiple insults when the absorbent assembly or core is more saturated. Many pads have the ability to maintain contact between the pad and the wearer's body when the pad is dry. Unfortunately, after
10 at least one insult of fluid, the body-facing surface of the absorbent assembly or core shifts, swelling upward or drawing downward to the point of disrupting contact between the pad and the wearer's body. This disruption reduces the effective gasketing along the side edges of the pad.

 Many different attempts have been made to eliminate the occurrence of side
15 leakage. In thin pads, one example is to arrange a number of longitudinal compressed areas in the absorbent assembly or core for the purpose of rapidly spreading the fluid longitudinally. These compressed areas are, however, far from sufficient to satisfactorily eliminate side leakage.

20 It is also known to further widen the fluid-impermeable backsheet layer so as to cover, in addition to the back and side edges of the pad, also a portion of the body-facing surface. In such a design, the fluid already collected in the absorbent assembly or core is effectively enclosed. However, there is the substantial disadvantage in that the fluid-impermeable backsheet layer is folded in over a portion of the body-facing surface,
25 covering a major portion of the body-facing surface of the pad. When the pad is deformed during use, fluid can run directly out of the pad over the portions of the backsheet layer folded over the body-facing surface.

 Absorbent pads have also incorporated elastic members in an attempt to form a
30 bowed shaped or a bucket-shaped product with the goal of better fluid containment and improved leakage performance. Present elasticized pads have been less than successful in achieving this goal. One reason is that the elasticized sides of many existing pads create ineffective barriers to fluid movement. In some current absorbent pads, for example, the elastic structures tend mainly to bunch the pad, and particularly tend to
35 bunch the absorbent assembly or core in the central portion of the pad. As a

consequence of ineffective elastic utilization, current absorbent pads are subject, much too commonly, to failure in the form of leakage.

Thus, there is a need for an absorbent pad with elasticized side flaps that provides a bucket-shaped receptacle with effective elastic members. In addition, there is a need for an absorbent pad with effective gasketing characteristics creating a barrier that reduces side leakage not only when the pad is dry but also after multiple insults and heavier fluid loads.

Summary of the Invention

It has now been discovered that the performance and even comfort of disposable absorbent pads can be enhanced by constructing the pads with more effective elasticized side flaps. The term "absorbent pads" is used herein to refer to devices to absorb and retain bodily discharges that do not rely on belts, diaper-like fastening tapes or elastic straps for proper positioning. Thus, the term "absorbent pads" includes a variety of pads, guards and sanitary napkins that may be used for urinary incontinence or menstruation. The term "disposable" includes being disposed of after use and not intended to be washed and reused.

In one embodiment, an absorbent pad defines longitudinal and transverse axes and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps of the absorbent pad are disposed transversely outward of the absorbent assembly, and each side flap comprises an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position. The absorbent pad has a Gurley stiffness of greater than 2000 milligrams.

In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed transversely outward of the absorbent assembly. Each side flap comprises an

elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. Garment attachment means are disposed on the backsheet layer remote from the absorbent assembly. The garment attachment means are positioned and extend longitudinally outward of the active ends of the elastic members. The absorbent pad has an Effective Elastic Value of at least 30 millimeters.

In another embodiment, an absorbent pad defines longitudinal and transverse axes and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side flaps of the absorbent pad are disposed transversely outward of the absorbent core, and each side flap comprises an elastic member that is at least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position. The absorbent pad has a Gurley stiffness of greater than 800 milligrams.

In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent core sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed transversely outward of the absorbent core. Each side flap comprises an elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. Garment attachment means are disposed on the backsheet layer remote from the absorbent core. The garment attachment means are positioned and extends longitudinally outward of the active ends of the elastic members. The absorbent pad has an Effective Elastic Value of at least 30 millimeters.

In another embodiment, an absorbent pad defines longitudinal and transverse axes and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly (or a single layer absorbent core) sandwiched between the backsheet layer and the topsheet layer. Side flaps of the absorbent pad are disposed transversely outward of the absorbent core, and each side flap comprises an elastic member that is at least partly out of the plane of the absorbent assembly (or absorbent core) when the absorbent pad is in a generally flat position. The side flaps are folded during use prior to an insult of fluid on the absorbent pad. The side

flaps at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

5 In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly (or absorbent core) sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed transversely outward of the absorbent assembly (or
10 absorbent core). Each side flap comprises an elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. The side flaps are folded during use prior to an insult of fluid on the absorbent pad. The side flaps at least partially unfolded during use after at least one insult of fluid on the absorbent pad. Garment attachment means are disposed on the
15 backsheet layer remote from the absorbent assembly (or absorbent core). The garment attachment means are positioned and extend longitudinally outward of the active ends of the elastic members. The absorbent pad has an Effective Elastic Value of at least 30 millimeters.

20 In another embodiment, an absorbent pad defines longitudinal and transverse axes and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps of the absorbent pad are disposed transversely outward of the absorbent assembly, and each side flap comprises an elastic member that is at least
25 partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position. Each side flap of the absorbent pad maintains an upward gasketing contact relationship with a wearer's body during use that creates a bucket-shaped product.

In another embodiment, an absorbent pad defines a longitudinal axis, a transverse
30 axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed transversely outward of the absorbent assembly. Each side flap comprises a
35 proximal edge, a distal edge, a body-facing surface which is configured to be in a contacting relationship with a wearer's body during use. Each side flap comprises at least

one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. The proximal edge of each side flap is attached to the longitudinal side edges of the absorbent pad and the distal edge of each side flap remains unattached from the longitudinal side edges of the absorbent pad.

5 The garment attachment means are disposed on the backsheet layer remote from the absorbent assembly. The garment attachment means are positioned and extend longitudinally outward of the active ends of the elastic members. The absorbent pad has an Effective Elastic Value of at least 30 millimeters.

10 In another embodiment, an absorbent pad defines longitudinal and transverse axes, and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side flaps of the absorbent pad are disposed transversely outward of the absorbent core. Each side flap comprises an elastic member that is at
15 least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position. Each side flap of the absorbent pad maintains an upward gasketing contact relationship with a wearer's body during use creating a bucket-shaped product to capture and hold leakage.

20 In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side
25 flaps are disposed transversely outward of the absorbent core. Each side flap comprises a proximal edge, a distal edge, a body-facing surface which is configured to be in an upward gasketing contact relationship with a wearer's body during use that creates a bucket-shaped product to capture leakage. Each side flap comprises at least one elastic member having opposite active ends that are longitudinally spaced from the respective
30 longitudinal end edges of the absorbent pad. The proximal edge of each side flap is attached to the longitudinal side edges of the absorbent pad and the distal edge of each side flap remains unattached from the longitudinal side edges of the absorbent pad. The garment attachment means are disposed on the backsheet layer remote from the absorbent core. The garment attachment means are positioned and extend longitudinally
35 outward of the active ends of the elastic members. The absorbent pad has an Effective Elastic Value of at least 30 millimeters.

In another embodiment, an absorbent pad defines longitudinal and transverse axes, and comprises a backsheet layer, a liquid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed at least partially transversely outward of the absorbent assembly. Each side flap comprises an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position. The absorbent pad has a Gibbosity Factor of less than about 18.

10 In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a liquid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps are
15 disposed transversely outward of the absorbent assembly. Each side flap comprises an elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. The garment attachment means are disposed on the backsheet layer remote from the absorbent assembly. The garment attachment means positioned and extend longitudinally outward of the active ends of the
20 elastic member. The absorbent pad has a Gibbosity Factor of less than about 18.

In another embodiment, an absorbent pad defines longitudinal and transverse axes, and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed at least transversely outward of the absorbent assembly. Each side flap comprises an elastic member that is at least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position. The absorbent pad has a Gibbosity Factor of less than about 18.

30 In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side
35 flaps are disposed transversely outward of the absorbent core. Each side flap comprises an elastic member having opposite active ends that are longitudinally spaced from the

respective longitudinal end edges of the absorbent pad. The garment attachment means are disposed on the backsheet layer remote from the absorbent core. The garment attachment means are positioned and extend longitudinally outward of the active ends of the elastic members. The absorbent pad has a Gibbosity Factor of less than about 18.

5

In another embodiment, an absorbent pad defines longitudinal and transverse axes, and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed at least partially transversely outward of the absorbent assembly. Each side flap comprises an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position. Each side flap maintains a gasketing contact relationship with a wearer's body during use. The absorbent pad has a Gibbosity Factor of less than about 18.

In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and an absorbent assembly sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed transversely outward of the absorbent assembly. Each side flap comprises a proximal edge, a distal edge, and a body-facing surface which is configured to be in a contacting relationship with a wearer's body during use. Each side flap comprises at least one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. The proximal edge of each side flap is attached to the longitudinal side edges of the absorbent pad. The distal edge of each side flap remains unattached from the longitudinal side edges of the absorbent pad. The garment attachment means are disposed on the backsheet layer remote from the absorbent assembly. The garment attachment means are positioned and extend longitudinally outward of the active ends of the elastic members. The absorbent pad has a Gibbosity Factor of less than about 18.

In another embodiment, an absorbent pad defines longitudinal and transverse axes, and comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side flaps are disposed transversely outward of the absorbent core. Each side flap comprises an elastic member that is at least partly out of

the plane of the absorbent core when the absorbent pad is in a generally flat position. Each side flap maintains a gasketing contact relationship with a wearer's body during use. The absorbent pad has a Gibbosity Factor of less than about 18.

5 In another embodiment, an absorbent pad defines a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges. The absorbent pad comprises a backsheet layer, a fluid permeable topsheet layer superposed on the backsheet layer, and a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer. Side
10 flaps are disposed transversely outward of the absorbent core. Each side flap comprises an proximal edge, a distal edge, and a body-facing surface which is configured to be in a gasketing contact relationship with a wearer's body during use. Each side flap comprises at least one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad. The proximal edge of
15 each side flap is attached to the longitudinal side edges of the absorbent pad. The distal edge of each side flap remains unattached from the longitudinal side edges of the absorbent pad. The garment attachment means are disposed on the backsheet layer remote from the absorbent core. The garment attachment means are positioned and extend longitudinally outward of the active ends of the elastic members. The absorbent
20 pad has a Gibbosity Factor of less than about 18.

Numerous features and advantages of the present invention will appear from the following description. In the description, reference is made to the accompanying drawings which illustrate preferred embodiments of the invention. Such embodiments do not
25 represent the full scope of the invention. Reference should therefore be made to the claims herein for interpreting the full scope of the invention.

Brief Description of the Drawings

30

Figure 1 representatively shows a perspective view of an absorbent pad according to the present invention.

Figure 2 representatively shows a longitudinal section view taken along line 2 - 2 of
35 **Figure 1.**

Figure 3 representatively shows a transverse section view taken along line 3 - 3 of **Figure 1**.

5 **Figure 4** representatively shows a top plan view of the absorbent pad of **Figure 1**, taken from the body-facing side of the pad and in a stretched and laid flat condition, with portions broken away for purposes of illustration.

10 **Figure 5** representatively shows a bottom plan view of the absorbent pad of **Figure 1** taken from the garment-facing side of the pad and in a stretched and laid flat condition, with portions broken away for purposes of illustration.

Figure 6 representatively shows one embodiment of an absorbent assembly for use in the absorbent pad of **Figure 1**.

15 **Figure 7** representatively shows a longitudinal section view taken along line 2 - 2 of **Figure 1**.

20 **Figure 8** representatively shows a transverse section view taken along line 3 - 3 of **Figure 1**.

Figure 9 representatively shows a top plan view of the absorbent pad of **Figure 1**, taken from the body-facing side of the pad and in a stretched and laid flat condition, with portions broken away for purposes of illustration.

25 **Figure 10** representatively shows one embodiment of an absorbent core for use in the absorbent pad of **Figure 1**.

30 **Figure 11** representatively shows a top plan view of the absorbent pad of **Figure 1**, taken from the body-facing side of the pad and in a stretched and laid flat condition showing a folded configuration of the side flaps, with portions broken away for purposes of illustration.

35 **Figure 12** representatively shows a longitudinal side view of the absorbent pad of **Figure 1**, taken along line 2 -2 showing the pad and the side flaps in a relaxed configuration.

Figure 13 representatively shows a longitudinal side view of the absorbent pad of **Figure 1**, taken along line 2 - 2 showing the pad and the side flaps in an extended configuration.

5 **Figure 14** representatively shows a schematic representation of the apparatus used to measure the Gibbosity Factor.

10 **Figure 15** representatively shows a top plan view of the absorbent pad of **Figure 1**, taken from the body-facing side of the pad and in a stretched and laid flat condition showing fields-of-view used to evaluate the pad.

15 **Figure 16** representatively shows a top plan view of the absorbent pad of **Figure 1**, taken from the body-facing side of the pad and in a stretched and laid flat condition showing fields-of-view used to evaluate the pad.

20 **Figure 17** representatively shows a longitudinal section view taken along line 2-2 of **Figure 1**.

Detailed Description of the Preferred Embodiments

20

With reference to **Figures 1 - 5**, an absorbent article formed according to the invention is shown for purposes of illustration as a disposable absorbent pad **20** for adult incontinence. Alternatively, the invention may be embodied in absorbent pads adapted specifically for absorption of menses, blood, or other body excrement.

25

30 The illustrated absorbent pad **20** defines a longitudinal axis or centerline represented by arrow **22**, which generally corresponds to the greatest planar dimension of the pad (**Figures 1 and 4**). A perpendicular transverse axis or centerline is represented by arrow **24**. The absorbent pad **20** has opposite longitudinal end edges **26** and **27**, and longitudinal side edges **28** and **29** that extend between the longitudinal end edges. The end edges **26** and **27** and side edges **28** and **29** may be straight, curvilinear or irregularly shaped. Suitable absorbent pads have a length dimension measured between the longitudinal end edges **26** and **27** of from about 10 to about 40 centimeters (cm.), more particularly from about 20 to about 30 cm., and a width dimension measured between the longitudinal side edges **28** and **29** of from about 3 to about 12 cm., more particularly from about 5 to about 10 cm.

35

The absorbent pad **20** includes a substantially fluid impermeable backsheet layer **30** (**Figures 2 - 5 and 7 - 9**), a fluid (or liquid) permeable topsheet layer **31** (**Figures 1 - 4 and 7 - 9**) superposed on the backsheet layer **30**, and an absorbent assembly **32** (**Figures 2 - 4 and 7 - 9**) sandwiched between the backsheet layer **30** and the topsheet layer **31**. The backsheet and topsheet layers **30** and **31** are desirably longer and wider than the absorbent assembly **32** (or absorbent core **33**). The topsheet layer **31** is designed to be positioned toward the wearer and is referred to as the body-facing surface **34**. Conversely, the backsheet layer **30** is designed to be positioned toward the undergarment of the wearer and is referred to as the garment-facing surface **35**.

The backsheet layer **30** desirably comprises a material that is formed or treated to be fluid impermeable. Alternatively, the backsheet layer **30** may comprise a fluid permeable material and other suitable means (not shown), such as a fluid impermeable layer associated with the absorbent assembly **32** (or absorbent core **33**), may be provided to impede fluid movement away from the absorbent assembly **32** (or absorbent core **33**). The backsheet layer **30** may comprise a single layer of material or a laminate of two or more separate layers of material. Suitable backsheet layer materials include films, wovens, nonwovens, laminates of films, wovens, and/or nonwovens, rubber sheets, or the like. For example, the backsheet layer **30** may comprise a thin, substantially fluid impermeable web or sheet of plastic film such as polyethylene, polypropylene, or similar material. One suitable material for the backsheet layer **30** is a 0.028 millimeter (mm) thick polyethylene film with a systematic matte embossed pattern and that has been corona treated on both sides. The terms "fluid impermeable" or "liquid impermeable" as used herein to describe a layer or laminate means that fluid or liquid such as urine will not pass through the layer or laminate under ordinary use conditions in a direction generally perpendicular to the plane of the layer or laminate at the point of fluid (or liquid) contact.

The absorbent assembly **32** comprises materials adapted to absorb and retain urine, menses, blood, or other body excrement. The absorbent assembly **32** may comprise various natural or synthetic absorbent materials, such as cellulose fibers, surfactant treated meltblown fibers, wood pulp fibers, regenerated cellulose or cotton fibers, a blend of pulp and other fiber, or the like. One such material is a coform material which is composed of a mixture of cellulosic fibers and synthetic polymer fibers. The absorbent assembly **32** may also include compounds to increase its absorbency, such as 0 - 95 weight percent of organic or inorganic high-absorbency materials, which are

typically capable of absorbing at least about 15 and desirably more than 25 times their weight in water. Suitable high-absorbency materials are described in U.S. Patents 4,699,823 issued October 13, 1987, to Kellenberger et al. and 5,147,343 issued September 15, 1992, to Kellenberger, which are incorporated herein by reference.

5 High-absorbency materials are available from various commercial vendors, such as Dow Chemical Company, Hoechst Celanese Corporation, and Allied Colloids, Inc. The absorbent assembly **32** may also include tissue layers or acquisition or distribution layers to help maintain the integrity of fibrous absorbents or transport fluids.

10 One suitable absorbent assembly **32** for the absorbent pad **20** is separately illustrated in **Figures 6 and 10** and comprises a fluid storage layer **37** and an acquisition/distribution layer **38**. The storage layer **37** comprises an air-laid mixture of 470 gsm wood pulp fibers and 305 gsm high-absorbency materials that is sandwiched between a pair of 19 gsm cellulose tissues. The storage layer **37** is desirably embossed
15 using a matched male/male embossing roll. The illustrated absorbent assembly **32** is hourglass shaped with a length of about 29.5 cm. and a width of between about 6.4 and 8.3 cm. The absorbent assembly **32** desirably has a thickness dimension of less than about 20 mm., particularly less than about 10 mm.

20 The acquisition/distribution layer **38** is disposed on the fluid storage layer **37** toward the body-facing surface **34** of the absorbent pad **20** to help decelerate and diffuse surges of fluid that may be introduced into the absorbent assembly **32**. The acquisition/distribution layer **38** comprises a through-air bonded carded web composed of a blend of 40 percent 6 denier polyester fibers, commercially available from Hoechst
25 Celanese Corporation, and 60 percent 3 denier polypropylene/polyethylene side-by-side bicomponent fibers, commercially available from BASF Corporation, with an overall basis weight of about 120 gsm. Alternative acquisition/distribution materials are described in U.S. Patent 5,192,606 issued March 9, 1993, to D. Proxmire et al.; U.S. Patent 5,486,166 issued January 23, 1996, to Ellis et al.; U.S. Patent 5,490,846 issued February 13, 1996,
30 to Ellis et al.; and U.S. Patent 5,509,915 issued April 23, 1996, to Hanson et al.; the disclosures of which are hereby incorporated by reference. The illustrated acquisition/distribution layer **38** is rectangular with a length of about 19.1 cm. and a width of about 4.5 cm.

35 In other embodiments of the present invention, the absorbent pad **20** includes a single layer absorbent core **33** in place of the absorbent assembly **32**. (See **Figure 10**.)

The absorbent core **33** comprises materials adapted to absorb and retain urine, menses, blood, or other body excrement. The absorbent core **33** may comprise various natural or synthetic absorbent materials, such as cellulose fibers, surfactant treated meltblown fibers, wood pulp fibers, regenerated cellulose or cotton fibers, a blend of pulp and other fiber, or the like. One such material is coform material which is composed of a mixture of cellulosic fibers and synthetic polymer fibers. The absorbent core **33** may also include compounds to increase its absorbency, such as 0 - 95 weight percent of organic or inorganic high-absorbency materials, which are typically capable of absorbing at least about 15 and desirably more than 25 times their weight in water. Suitable high-absorbency materials are described in U.S. Patents 4,699,823 issued October 13, 1987, to Kellenberger et al. And 5,147,343 issued September 15, 1992, to Kellenberger, which are incorporated herein by reference. High-absorbency materials are available from various commercial vendors, such as Dow Chemical Company, Hoechst Celanese Corporation, and Allied Colloids, Inc.

One suitable absorbent core **33** for the absorbent pad **20** is separately illustrated in **Figures 7 - 10** and comprises a fluid storage layer **37**. The storage layer **37** comprises an air-laid mixture of 470 gsm wood pulp fibers and 305 gsm high-absorbency materials that is sandwiched between a pair of 19 gsm cellulose tissues. The storage layer **37** is desirably embossed using a matched male/male embossing roll. The illustrated absorbent core **33** is hourglass shaped with a length of about 29.5 cm and a width of between about 6.4 and 8.3 cm. The absorbent core **33** desirably has a thickness dimension of less than about 20 mm, particularly less than about 10 mm.

The topsheet layer **31** is formed of a fluid permeable material so that fluid waste, and possibly semi-solid waste as well, can pass through the liner and be absorbed by the absorbent assembly **32** (or absorbent core **33**). Suitable topsheet layers **31** may comprise a nonwoven web, a spunbond, meltblown or bonded-carded web composed of synthetic polymer filaments or fibers, such as polypropylene, polyethylene, polyesters or the like, a perforated film, or a web of natural polymer filaments or fibers such as rayon or cotton. In addition, the topsheet layer **31** may be treated with a surfactant to aid in fluid transfer. In one particular embodiment, the topsheet layer **31** comprises a nonwoven, spunbond web of side-by-side bicomponent filaments with 50 percent polyethylene and 50 percent polypropylene having a basis weight of about 20 grams per square meter (gsm). The fabric is surface treated with a surfactant commercially available from Union Carbide Chemicals and Plastics Company, Inc., of Danbury, Connecticut, U.S.A. under the trade

designation TRITON X-102. As used herein, the term "fabric" refers to all of the woven, knitted and nonwoven fibrous webs. The term "nonwoven web" means a web of material that is formed without the aid of a textile weaving or knitting process.

5 The absorbent pad **20** includes a pair of side flaps **40** disposed along and forming the side edges **28** and **29** of the pad. The side flaps **40** are disposed transversely outward of the absorbent assembly **32** (or absorbent core **33**) and may be formed partially or completely by portions of the backsheet layer **30** and/or the topsheet layer **31**. In the illustrated embodiment, the side flaps **40** are formed by lateral portions of both the
10 backsheet layer **30** and the topsheet layer **31**, and by portions of two side panel members **42** and **44**. The side flaps **40** include elastic members **46** (**Figures 3 - 5** and **8 - 9**) adapted to gather portions of the longitudinal side edges **28** and **29**.

 For purposes of the present invention, the term "side flap" refers to portions of the
15 absorbent pad disposed transversely outward of the absorbent assembly **32** (or absorbent core **33**) and at least partially gathered together by elastic structures to form impediments to lateral fluid movement. The side flaps **40** may comprise fluid permeable or fluid impermeable materials. The terms "disposed," "disposed on," "disposed with," "disposed at," "disposed near" and variations thereof are intended to mean that one element can be
20 integral with another element, or that one element can be a separate structure bonded to or placed with or placed near another element. The terms "inward" and "outward" refer to positions relative to the center of an absorbent garment, and particularly transversely and/or longitudinally closer to or away from the longitudinal and transverse centerlines **22** and **24** of the absorbent pad **20**.

25 In one embodiment, with particular reference to **Figures 3 - 5** and **8 - 9**, the separate side panel members **42** and **44** are desirably bonded to the backsheet layer **30** transversely outward from the longitudinal centerline **22**. Each side panel member **42** and **44** includes a proximal edge **48** and an opposite distal edge **49** (**Figures 3 - 5** and **8 - 9**).
30 In the illustrated embodiment, the proximal edges **48** are disposed on the garment-facing surface **35** of the absorbent pad **20**, and the distal edges **49** are disposed in the side flaps **40**. Adjacent the distal edges **49**, the side panel members **42** and **44** desirably include a folded region **50** to encase the elastic members **46**. The folded region **50** is thus raised above the plane of the absorbent assembly **32** (or absorbent core **33**) and defines a free
35 edge **51** of each side flap **40**.

The side panel members **42** and **44** are desirably formed of a soft, gatherable material such as a spunbond nonwoven or the like. In one particular embodiment, the side panel members **42** and **44** comprise a high loft fuzzy nonwoven spunbond made of side-by-side bicomponent filaments of 50 percent polyethylene and 50 percent polypropylene.

As best illustrated in **Figures 4 - 5** and **9**, the side flaps **40** extend the full length of the absorbent pad **20**. The side flap **40** structure may be folded and bonded to itself near the longitudinal end edges **26** and **27** in order to reduce the quantity of free material in the corners. The regions **52** of the side flaps **40** that are bonded to themselves are illustrated with cross hatched lines in **Figures 4** and **9**, and the resulting inversion of the side flaps is shown in **Figures 1 - 2** and **7**. Alternatively, the longitudinal ends of the side flaps **40** may be folded over and bonded onto the body-facing side of the absorbent assembly **32** (or absorbent core **33**), or may not be folded and bonded in place at all (not shown).

The width of the fluid impermeable backsheet layer **30** may be selected so that the backsheet layer **30** is present in at least a portion of the side flaps **40**. In this case, at least a portion of the height of the side flaps **40** will be fluid impermeable. The backsheet layer **30** may be less comfortable against the skin of the wearer, and thus may be completely covered by either the topsheet layer **31** or the side panel members **42** and **44**. Alternatively, the side flaps **40** may be formed completely of one or both of the topsheet layer **31** or the side panel members **42** and **44** (not shown).

The elastic members **46** are desirably operable over less than the full length of the absorbent pad **20**. Each elastic member **46** has opposite active ends **54** (**Figures 4 - 5** and **9**) that are longitudinally spaced from the longitudinal end edges of the absorbent pad **20**. As used herein, the term "active ends" refers to the terminal points of the elastic members **46** that are attached to other materials of the side flap **40** and between which the elastic member **46** is effective to gather together the side flap **40**.

The elastic members **46** are longitudinally orientated in each side flap **40** and operatively joined to the side flap **40**. The elastic members **46** may be bonded to the side flap **40** in a stretched condition, bonded in a relaxed state to a gathered portion of the side flap **40**, or may have elastic properties activated after being bonded to the side flap **40**. "Operatively joined," with reference to the attachment of an elastic member to another element, means that the elastic member when attached to or connected to the element, or

treated with heat or chemicals, by stretching, or the like, gives the element elastic properties; and with reference to the attachment of a non-elastic member to another element, means that the member and element can be attached in any suitable manner that permits or allows them to perform the intended or described function of the joiner.

- 5 The joining, attaching, connecting or the like can be either directly, such as joining either member directly to an element, or can be indirectly by means of another member disposed between the first member and the first element.

The elastic members **46** may be formed of a dry-spun coalesced multifilament
10 elastomeric thread sold under the tradename LYCRA and available from E.I. Du Pont de Nemours and Company. Alternately, the elastic members **46** may be formed of other typical elastics utilized in making incontinence products, such as a thin ribbon of natural rubber, wet-spun spandex materials, a stretch bonded laminate material comprising a prestretched elastic meltblown inner layer sandwiched between and bonded to a pair of
15 spunbond polypropylene nonwoven webs, or the like. Elasticity could also be imparted to the absorbent article by extruding a hot melt elastomeric adhesive on the side flaps **40**.

The terms "elastic," "elasticized" and "elasticity" mean that property of a material by virtue of which it tends to recover its original size and shape after removal of a force
20 causing a deformation. "Elastomeric" refers to a material or composite which can be elongated by at least 25 percent of its relaxed length and which will recover, upon release of the applied force, at least 10 percent of its elongation. It is generally preferred that the elastomeric strands be capable of being elongated by at least 100 percent of its relaxed length and recover, upon release of an applied force, at least 50 percent of its elongation.

25

To improve performance of the side flaps **40** in particular and the absorbent pad **20** overall, the elastic members **46** of each side flap **40** are desirably positioned at least partly out of the plane of the absorbent assembly **32** (or, in other embodiments, the absorbent core **33**) when the absorbent pad **20** is in a generally flat position (see **Figure 17**), as the
30 pad **20** would be when worn by an adult. In general, an elastic member **46** is considered to be at least partly out of the plane of the absorbent assembly **32** (or absorbent core **33**) when, at some point at or between the active ends **54**, a portion of the elastic member **46** is disposed above the top surface of the absorbent assembly **32** (or absorbent core **33**). The position of the elastic member **46** relative to the plane of the absorbent assembly **32**
35 (or absorbent core **33**) is measured while a bar **39** is resting on the center of the absorbent pad **20** to generally simulate one possible use position. If more than one

elastic member **46** is disposed in a side flap **40**, the elastic member **46** closest to the longitudinal centerline **22** is used to determine the position relative to the plane of the absorbent assembly **32** (or absorbent core **33**).

5 In particularly desirable embodiments, the elastic members **46** of each side flap **40** are positioned completely out of the plane of the absorbent assembly **32** (or absorbent core **33**) when the absorbent pad **20** is in a generally flat position. An elastic member **46** is considered completely out of the plane of the absorbent assembly **32** (or absorbent core **33**) when both active ends **54** and all portions therebetween are disposed above the
10 top surface of the absorbent assembly **32** (or absorbent core **33**). The position of the elastic member **46** relative to the plane of the absorbent assembly **32** (or absorbent core **33**) is measured while a bar **39** is resting on the center of the absorbent pad **20** to generally simulate one possible use position. (See **Figure 17**.)

15 The configuration of the side flaps **40** is such that the elastic members **46** rise at least partially out of the plane of the absorbent assembly **32** (or absorbent core **33**), allowing the side flaps **40** and the elastic members **46** to fit against or closer to the body of the wearer between the labia and the legs thereby providing a gasketing contact between the side flaps **40** and the wearer's body. The gasketing contact is provided toward the
20 abdomen and the buttocks along nearly the entire length of the pad **20**.

 In addition, the configuration of the side flaps **40** of the present invention provides a bucket shaped structure. The side flaps **40** serve to stop or impede fluid migration away from the absorbent assembly **32** (or absorbent core **33**) during fluid insults before the fluid
25 has been absorbed into the absorbent assembly **32** (or absorbent core **33**). Typically during fluid insults, especially insults having larger volumes, several seconds elapse before the entire insult is absorbed. During this time, the fluid flows or migrates to the edges of the absorbent article. The side flaps **40** function as a dam or barrier, retaining the fluid in proximity of the absorbent assembly **32** (or absorbent core **33**) until the fluid
30 can be absorbed. Because the elastic members **46** and the side flaps **40** extend above the plane of the absorbent assembly **32** (or absorbent core **33**), a bucket shaped structure is formed in which the fluid can be retained until it is absorbed by the pad **20**.

 Absorbent articles lacking side flaps **40** do not provide the bucket shaped structure
35 to retain the fluid until absorbed into the absorbent article. Absorbent articles without upward standing side flaps **40** not only hold the absorbent structure of the article closer to

the body of the wearer, leaving little or no space for the fluid to be retained until absorbed, but also lack any structure to prevent or impede fluid migration away from the absorbent structure. Elastic material located at the sides of the absorbent assembly 32 (or absorbent core 33), rather than in flap structures such as side flaps 40, do not hold the fluid in the proximity of the absorbent structure long enough to allow absorption of the fluid. Rather, such elastic material assists in positioning and maintaining placement of the article and providing article sides that more comfortably accommodate the insides of the wearer's legs.

The elastic members 46 desirably have an Elastic Out Of The Plane Value, which represents the height of an elastic member 46 above the plane of the absorbent assembly 32 (or absorbent core 33), of at least about 1 mm, particularly at least about 5 mm, and more particularly of from about 10 mm to about 30 mm, and most particularly of from about 10 mm to about 100 mm for improved performance. Constructing the absorbent pad 20 to have elastic members 46 a particular height above the absorbent assembly 32 (or absorbent core 33) may require adjusting the spacing of the elastic members 46 from the absorbent assembly 32 (or absorbent core 33) and varying the degree to which the side flaps 40 are free to move independently of the absorbent assembly 32 (or absorbent core 33). In one embodiment, the elastic members 46 comprise strands of 720 denier elastomeric thread stretched 160 percent of its original length and operatively joined to the side panel members 42 and 44 with a hot melt adhesive over a distance of 16.5 cm.

One procedure for measuring the Elastic Out Of The Plane Value is an Elastic Height Test, which measures the distance of the innermost elastic member 46 to the surface of the absorbent assembly 32 (or absorbent core 33). (See **Figure 17.**) Because the test is performed with the pad 20 resting on a table with the garment-facing surface 35 toward the table, the innermost elastic member 46 can be considered the "lowest" member 46. The lowest elastic member 46 is the member 46 that is closest to the garment attachment adhesive 60 side of the pad 20. The body-facing surface 34 of the absorbent pad 20 is considered the plane or surface of the absorbent assembly 32 (or absorbent core 33).

The pad 20 is placed on the top surface of a level bench with the garment-facing surface 35 toward the bench. The test employs a generally flat bar 39 of stainless steel weighing approximately 358 grams and measuring 5.7 cm wide by 12.7 cm long by 6.4 millimeters (mm) thick (2.25 by 5 by 0.25 in.). One of the major surfaces of the bar 39

is placed on the body-facing surface **34** of the pad **20**, longitudinally and transversely centered relative to the absorbent assembly **32** (or absorbent core **33**).

For purposes of the present invention, the absorbent pad **20** is considered to be “in
5 a generally flat position” when the bar **39** is situated as described. The bar **39** should
neither cover nor contact the side flaps **40** or the elastic members **46**. Appropriate
adjustments in the length of the bar **39** may be required so that the bar **39** is within about
30 to about 75 percent of the pad length, more preferably within about 30 to about 50
percent of the pad length. If the absorbent pad **20** has been bi-folded or tri-folded in the
10 packaging process, the length of the bar **39** is adjusted such that the bar **39** extends
beyond the folds of the absorbent pad **20**.

Identify a portion of the elastic member **46** that is closest to the surface of the bench
which corresponds to the lowest portion of the elastic member **46**. The lowest portion
15 may occur between the active ends **54** or at one of the active ends **54**.

Measure the distance between the surface of the bar **39** disposed toward the pad
20 and the elastic member **46** that is closest to the bench surface at the point where
elastic member **46** is closest to the bench surface. This distance is represented by the
20 number **74** on **Figure 17**. If the elastic member **46** is closer to the bench than is the
surface of the bar **39**, record the Elastic Out Of The Plane Value measurement as a
negative value. If the elastic member **46** is further from the bench than is the surface of
the bar **39**, record the Elastic Out Of The Plane Value measurement as a positive value.
In contrast to the Elastic Out Of The Plane Value, if the elastic member **46** is above the
25 surface of the bar **39**, that is the plane of the absorbent assembly **32** (or absorbent core
33), at any point at or between the active ends **54**, the elastic member **46** is considered to
be at least partly out of the plane of the absorbent assembly **32** (or absorbent core **33**).

It may be difficult to see where the elastic members **46** are while measuring. If this
30 occurs, use a very fine line magic marker, for example a SANFORD® Ultra Fine Point
SHARPIE® to highlight the elastic member **46** closest to the bench surface.

Calculate the average and standard deviation for 15 sample pads **20**, with one
measurement per side. The average represents the Elastic Out Of The Plane Value.
35

Another feature impacting performance of the absorbent pad **20** is the degree of flexibility or stiffness of the absorbent portion of the pad **20**. Despite a general perception that pads need to be flexible to conform to the body and remain comfortable, it has been discovered that absorbent pads **20** with a greater degree of stiffness tend to curve rather than bunch when combined with effective elastic members **46**, such as elastic members **46** located out of the plane of the absorbent assembly **32** (or absorbent core **33**).

In particular embodiments, for example, wherein the absorbent pad **20** includes an absorbent assembly **32**, the absorbent pad **20** desirably has an average Gurley stiffness value of greater than 2000 milligrams (mg), such as from 2000 to about 15000 mg., particularly greater than about 3000 mg., such as from about 3000 to about 5000 mg., and more particularly from about 3000 to about 4500 mg., for improved performance. In one embodiment, the requisite Gurley stiffness is obtained by embossing the absorbent assembly **32** of the pad **20** with a pattern that creates soft pillows between embossing lines. Heat, moisture and pressure are used to create an embossed area that resists bunching, and soft pillows are formed between the embossments to allow the pad **20** to remain comfortable to the wearer. The desired levels of stiffness function with the elastic members **46** to enable the elastic members **46** to curve the absorbent pad **20** into the bucket shape after being unfolded and to achieve the desired smoothness of the body-facing surface **34**. The desired levels of stiffness also tend to resist bunching and the formation of creases in the absorbent assembly **32** during manufacture, packaging and storage.

In other embodiments, for example, wherein the absorbent pad **20** includes an absorbent core **33**, the absorbent pad **20** desirably has an average Gurley stiffness value of greater than 800 milligrams (mg), such as from 800 to about 15000 mg., particularly greater than about 1000 mg., such as from about 1000 to about 8000 mg., and more particularly from about 2000 to about 4000 mg., for improved performance. In one embodiment, the requisite Gurley stiffness is obtained by embossing the absorbent core **33** of the pad **20** with a pattern that creates soft pillows between embossing lines. Heat, moisture and pressure are used to create an embossed area that resists bunching, and soft pillows are formed between the embossments to allow the pad **20** to remain comfortable to the wearer. The desired levels of stiffness function with the elastic members **46** to enable the elastic members **46** to curve the absorbent pad **20** into the bucket shape after being unfolded and to achieve the desired smoothness of the body-facing surface **34**. The desired levels of stiffness also tend to resist bunching and the

formation of creases in the absorbent core **33** during manufacture, packaging and storage.

Gurley stiffness is measured according to TAPPI test procedure T543 pertaining to stiffness of paper. The clamp of the Gurley stiffness tester is modified to insert the thickness of a pad without crushing. The test is conducted using a test specimen taken from part of the absorbent pad **20** including the absorbent assembly **32** (or absorbent core **33**), rather than including portions of the side and end margins of the pad **20**. Also, the test specimen desirably does not include the portions of the absorbent assembly **32** (or absorbent core **33**) that were folded during manufacture and packaging.

The performance of the absorbent pad **20** is improved when the side flaps **40** are effective to curve, forming a bucket, rather than simply wrinkling or bunching the pad **20**. The effectiveness of the elastic members **46** is particularly important after the absorbent pads **20** have been maintained in a folded position for an extended period of time. Commercial elasticized absorbent pads are packaged in a folded condition for sale to the consumer. Maintaining the absorbent pads **20** in a folded condition for extended periods can detract from the effectiveness of the elastic members **46**. In particular, if the elastic members **46** are not allowed to contract during storage, the retraction properties of the elastic members **46** may be greatly diminished. Additionally, if the absorbent pads **20** are constructed such that the elastic members **46** are disposed in the plane of the absorbent assembly **32** (or absorbent core **33**), the elastic members **46** will tend to bunch the absorbent pad **20** together during storage and the elastic members **46** will not be effective when the pad **20** is unfolded.

In particular embodiments, for example, the absorbent pad **20** has an Effective Elastic Value of at least 30 mm., particularly at least about 40 mm., and more particularly at least about 50 mm., for improved performances. The effectiveness of the elastic members **46** of an absorbent pad **20** can be determined by an Effective Elastic Value derived from an Effective Elastic Test. The test measures the effectiveness of the elastic members **46** of a folded pad **20** at maintaining the bucket shape for leakage protection without wrinkling or bunching the absorbent assembly **32** (or absorbent core **33**) after having been maintained in a folded condition. In general, a side flap **40**, in accordance with the present invention, is considered to be effective if the elastic members **46** pulls the side flap **40** up and curves the pad **20** when the pad **20** is unfolded. (See **Figure 13.**) The interaction of the elastic members **46** of the side flap **40** with the

absorbent assembly **32** (or absorbent core **33**) causes a controlled flexure of the absorbent assembly **32** (or absorbent core **33**) wherein the end edges **26** and **27** of the absorbent pad **20** are pulled toward each other. This configuration of the end edges **26** and **27** in combination with the side flaps **40** pulled up by the elastic members **46** form a bucket shaped device. If the elastic members **46** just bunch the absorbent assembly **32** (or absorbent core **33**) or lay flat against the body-facing surface **34** of the pad **20**, the bucket shape is lost. Side flaps **40** that include ineffective elastic members **46** do not provide the gasketing to the body of the wearer and increases leakage or fluid run-off from the side of the absorbent pad **20**.

The Effective Elastic Value test method is used to determine how much the elastic members **46** are elongated or stretched out during the use of the absorbent pad **20**. The amount or value of elongation of the elastic members **46** represents the effectiveness of the side flaps **40** of the absorbent pad **20** to remain erect and function as fluid dams during use. This test method, in general, measures the effectiveness of elastic materials in absorbent pad or guard products forming or having a bucket shaped structure. This effectiveness is called Effective Elastic Value, also referred to as the "EEV". The EEV of the elastic material is calculated by subtracting the relaxed length of an elasticized portion (see **Figure 12**) of the absorbent pad or guard from the length of that elasticized portion when the pad or guard is unfolded (see **Figure 13**), thereby extending the elastic material as the elastic material would be extended during use of the absorbent product when the bucket shaped structure is formed by the side flaps. The EEV can be expressed as the value of the extended length (mm) of an elasticized portion minus the value of the relaxed length of the same elasticized portion of an absorbent product **20** when the pad **20** is unfolded.

The Effective Elastic Value is calculated by subtracting a relaxed or folded elastic length **70** from an unfolded or extended elastic length **72**. See **Figures 12** and **13**. The pad **20** to be tested is removed from its pouch, if any, without being unfolded. Place the garment-facing side **35** of the central portion of the pad **20** toward a level bench top. Let the pad **20** open naturally. The pad **20** will not lie flat on the bench top, but rather will assume a "U" or "V" shaped configuration as the end edges **26** and **27** are pulled toward each other by the elastic members **46**. (See **Figure 12**.) With a permanent marker, for example a SANFORD® Ultra Fine Point SHARPIE®, mark the active ends **54** of the contracted elastic member **46** on both sides **28** and **29** of the pad **20**. The active ends **54** of the elastic member **46** can be identified at the point where the smooth portion of the

side flap **40** meets the gathered portion of the side flap **40**. The side flap **40** gathers where the elastic member **46** interacts with the side flap **40**. With a cloth tape measure, measure the distance between the marks on each side flap **40** making sure that the tape measure conforms as closely as possible to the curvature of the elastic member **46** in the pad **20**. Record this distance as relaxed elastic length **70**.

Unfold the pad by placing a 100 gram weight **64**, for example a 3.8 by 5.1 by 1.9 cm. (1.5 by 2.0 by 0.75 inch) aluminum block, on the very end of the absorbent assembly **32** (or absorbent core **33**) and with another 100 gram weight **64**, push the opposite end of the absorbent assembly **32** (or absorbent core **33**) toward the bench until the pad ends **26** and **27** are both on the bench surface. (See **Figure 13**.) Do not smooth out or stretch the center of the pad **20**. Allow the absorbent assembly **32** (or absorbent core **33**) of the pad **20** to interact with the elastic members **46** without interference. If the absorbent assembly **32** (or absorbent core **33**) of the pad **20** has a tendency or propensity to buckle, bunch, or wrinkle, do not prevent such a reaction or effect. Again measure the distance between the marks on the active ends **54** of the elastic members **46** and record as the extended or unfolded elastic length **72**.

Subtract the corresponding relaxed elastic lengths **70** from the extended or unfolded elastic lengths **72**. Calculate the average and standard deviation for 15 sample pads, with one measurement per side. The average represents the Effective Elastic Value.

By having the elastic members **46** located above the plane of the absorbent assembly **32** (or absorbent core **33**), the elastic members **46** tend to curve the absorbent pad **20** into a desirable bucket shape as opposed to simply bunching the pad **20** together. The absorbent assembly **32** (or absorbent core **33**) of the present invention is specifically designed to not to buckle, bunch, or wrinkle (or significantly reduce buckling, bunching, or wrinkling). The body-facing surface **34** of the absorbent pad **20** thus tends to exhibit a smooth, non-bunched surface, which is more desirable for fluid absorption and comfort.

The buckling, bunching, or wrinkling (the gibbosity) of the absorbent assembly **32** (or absorbent core **33**) can be measured using a surface topographic method. The pad **20** to be tested is removed from its pouch, if so packaged. The peel-strip is removed from the garment attachment adhesive **60** (discussed below). The garment-facing side **35** of the pad **20** is pressed down onto a 10 inch by 12 inch glass plate **80**, using the garment attachment adhesive **60** to adhere the pad **20** to the glass plate **80**. (See **Figure 14**.)

The topsheet layer **31** (the material acting as the body side liner or cover) is coated by brush application with a 1:1 solution of white Pentel® Correction Fluid (commercially available from the Pentel of Americas, LTD company located in Torrance, CA) and n-butanol to create an opaque surface for shadow projection. Typically, a coating of a few
5 tenths of a micron in thickness results. The pad **20** is allowed to dry overnight. This is necessary because of the absorption of the coating solution into the pad **20**.

The plate glass **80** with the pad **20** mounted on it is placed on a 12 inch by 12 inch auto-macrostage **84** covered with poster-board **82**, typically between 1/16 inch to 1/8 inch
10 in thickness to protect the auto-macrostage from scratching. The auto-macrostage is commercially available from the Design Components, Inc. located in Franklin, MA. The pad **20** is illuminated with a light source **86**, such as a slide projector, in a fixture that allows the light beam to be projected at an angle of 30 degrees from horizontal, wherein horizontal is defined as the surface on which the pad is mounted as shown in **Figure 14**.
15 The light beam from the light source **86** produces clear high-contrast shadows behind the wrinkles in the absorbent assembly **32** (or absorbent core **33**) when viewed through a lens **88**, such as a 50 mm EI-Nikkor lens at f/4. The 50 mm EI-Nikkor provides a 2.25 inch field-of-view.

20 The wrinkles are detected and evaluated as "line slices" using the multi-frame capacity of an image analysis system. Generally, four fields-of-view (each field-of-view is approximately 2 1/4 inches in length) are used to cover the entire length of the pad being evaluated. On a shorter pad, only 3 fields-of-view are required to evaluate the entire surface of the pad. The fields-of-view taken on a shorter pad are represented by lines
25 **100** as shown in **Figure 15**. The fields-of-view taken on a longer pad are represented by lines **110** as shown in **Figure 16**. Such an image analysis system is the Leica/Cambridge Quantimet 900 Image Analysis System commercially available from the Leica, Inc. located in Deerfield, IL. The 900 Image Analysis System is used with a scanner **90**, such as a Newvicon scanner also available from the Leica, Inc.

30 The image analysis system provides indexing of the stage from field to field. The stage itself rests upon the base of a Kreonite Mobile Studio commercially available the J. Kelly Associates located in Darien, IL. The analysis is completed using the WRINK2 software program written in the macro programming language, QUIPS, provided with the
35 Leica/Cambridge Quantimet 900 Image Analysis System. Using the routine as follows:

NAME = WRINK2

DOES = Optical crepe analysis providing two histograms:

One on PEAK HT; the other on PEAK-TO-PEAK distance.

AUTH = name of tester

5 DATE = day month year

Enter specimen identity

Scanner (No. 2 Newvicon LV= 0.00 SENS= 1.64)

Load Shading Corrector (pattern - BEHNKE)

10 Calibrate User Specified (Calibration Value = 0.06689 millimetres per pixel)*

CALL STANDARD

NO := 0.

NO := 18.

15 TANTHETA := 0.

TANTHETA := 0.57735

LTRAMECNT := 0.

20	Stage Scan	(X	Y
	Scan origin		15000.0	25000.0
	Field size		9600.0	4000.0
	No of fields		4	1)**

25 Detect 2D (Darker than 24 PAUSE)

For FIELD

FRAMEPOSX := 0.

FRAMEPOSY := 0.

30 XPOS := 70.

YPOS := 50.

Scanner (No. 2 Newvicon AUTO-SENSITIVITY LV= 0.00)

Live Frame is multiple Rectangle (X: 48, Y: 36, W: 800, H: 128,)

35 Image Frame is multiple Rectangle (X:XPOS , Y:YPOS , W: 750, H: 10,)

Detect 2D (Darker than 24)

Amend (OPEN by 2)

5

Amend (OPEN by 8 - Horizontally)

Amend (DILATE by 1 - Vertically)

Measure feature AREA FERET 0 FERET 90

10 Into array FEATURE (of 700 features and 4 parameters)

FEATURE CALC := TENTHETA * AREA / FERET 90

Distribution of COUNT v CALC from FEATURE in HISTO1

15 From 0.10 to 10.00 in 15 bins (LOG)

Amend (SKELETON - Sub mode = Peel Ends)

Amend (DILATE by 10 - Vertically)

Image Transfer from Invert A to Binary Output

20

Measure feature AREA FERET 0 FERET 90

Into array FEATURE (of 600 features and 4 parameters)

FEATURE CALC := AREA / FERET90

25

Distribution of COUNT v CALC from FEATURE in HISTO2

From 0.10 to 100.00 in 15 bins (LOG)

LFRAMECNT := LFRAMECNT + 1.

30

Stage Step

Next FIELD

35

Print " "

Print "PEAK HEIGHT HISTOGRAM (UM) - - - - -"

Print Distribution (HISTO1, differential, bar chart, scale = 0.00)

Print " "

Print " "

Print "VALLEY DISTANCE HISTOGRAM (UM) - - - - "

5 Print Distribution (HISTO2, differential, bar chart, scale = 0.00)

Print " "

Print "TOT SCAN LENG =" , LFRAMECNT * NO * CAL.CONST * I.FRAME.WR, " MM"

Print " "

Print "TOT # OF FIELDS =" , FIELDNUM , " DETECTION =" , DET.LOWER

10 For LOOPCOUNT = 1 to 4

Print " "

Next

End of Program

15

* NOTE - Calibrations values will vary slightly depending on actual camera and optics.

** NOTE - Number of fields for short pads equals 3.

20

Various measures are taken of wrinkle intensity, such as the count of peaks (line-slice length) per field and mean peak height. Similar procedures have been used in image analysis for tissue as discussed in the following U.S. Pat. Nos.: 5,667,635; 5,411,636; and, 5,722,968, the entire disclosures of which are hereby incorporated by reference in a manner that is consistent herewith. The measures taken are used to determine the Gibbosity Factor.

25

To further define the interaction between the absorbent assembly **32** (or absorbent core **33**) and the side flaps **40**, the Gibbosity Factor needs to be considered. For the bucket shaped structure to be formed within the pad **20**, the side flaps **40**, through the application of the elastic members **46** that are at least partially out of the plane of the absorbent assembly **32** (or absorbent core **33**), pull the end edges **26** and **27** of the pad **20** upward, toward each other. This is accomplished in the present invention as the side flaps **40** interact with the end edges **26** and **27** of the pad **20** and not with buckling, bunching, or wrinkling of the absorbent assembly **32** (or absorbent core **33**) due to the

35

structure and stiffness of the absorbent assembly **32** (or absorbent core **33**). The more the absorbent assembly **32** (or absorbent core **33**) wrinkles or otherwise deforms when acted upon by the side flaps **40**, the less the side flaps **40** interact with the end edges **26** and **27**. The less the side flaps **40** interact with the end edges **26** and **27** to form the bucket, the less the side flaps **40** remain above the plane, reducing the volume of bodily fluid and semi-fluid discharge that the formed bucket will hold, thereby resulting in increased leakage.

The Gibbosity Factor is the product of the number of peaks (buckles, bunches, wrinkles, ect.) that are formed within the absorbent assembly **32** (or absorbent core **33**) when the absorbent assembly **32** (or absorbent core **33**) interacts with elastic materials such as the elastic members **46** within the side flaps **40** and the average height of the peaks. The Gibbosity Factor represents the amount of deformation due to wrinkling type activity. The greater the Gibbosity Factor, the less likely a product will be able to form a bucket shaped structure as does the pad **20** of the present invention. The Gibbosity Factor is preferably less than about 18, more preferably less than about 15, and most preferably less than about 12.

The following formula is used to calculate the Gibbosity Factor:

$g = [p] [h]$ wherein
g = Gibbosity Factor
p = peak count
h = average peak height in mm units

The absorbent pad **20** also includes a means for holding the pad **20** in position during use. In the illustrated embodiment, garment attachment means such as garment attachment adhesive **60** is disposed on the backsheet layer **30** remote from the absorbent assembly **32** (or absorbent core **33**). The garment attachment adhesive **60** is desirably located transversely inward of the proximal edges **48** of the side panel members **42** and **44**. A peel strip **62** of release paper may be releasably bonded to the garment attachment adhesive **60** prior to use. Other garment attachment means such as mechanical fasteners, for example hook-and-loop fasteners, body attachment adhesive, wings, or the like may alternatively be used to hold the absorbent pad **20** in position relative to the undergarment or the wearer.

Performance of absorbent pads **20** of the present invention can be improved by incorporating a feature referred to herein as anti-roll back. The term "anti-roll back" is used to refer to an interrelation of components that minimizes the tendency of the end edges **26** and **27** of the absorbent pad **20** to roll up on themselves due to the effectiveness of the elastic members **46**. More specifically, the garment attachment adhesive **60** is positioned and extends longitudinally outward of the active ends **54** of the elastic members **46** and longitudinally inward of the respective longitudinal end edges **26** and **27** of the absorbent pad **20**. This particular feature allows the end edges **26** and **27** of the absorbent pad **20** to resist rolling back onto the body-facing surface **34** of the pad **20**. The garment attachment adhesive **60** is desirably positioned and extends longitudinally outward of the lines of elastic retraction force emanating from the active ends **54** of the elastic members **46**.

Roll-back of the end edges **26** and **27** of the absorbent pad **20** tends to occur with effective elastic members **46** because the elastic members **46** in the side flaps **40** pulls the end edges **26** and **27** of the pad **20** and rolls the end edges **26** and **27** toward the transverse centerline **24** of the pad **20**. Roll-back creates an uncomfortable lump as the absorbent assembly **32** (or absorbent core **33**) is doubled up. Roll-back also pulls the garment attachment adhesive **60** loose from the underwear which, when free of the underwear, can stick to skin and hair causing irritation and pain for a wearer.

The components of the absorbent pad **20** may be bonded together using ultrasonic bonds, thermal bonds, adhesives, or other suitable means. The term "bonded" refers to the joining, adhering, connecting, attaching, or the like, of two elements. Two elements will be considered to be bonded together when they are bonded directly to one another or indirectly to one another, such as when each is directly bonded to intermediate elements.

The present invention further comprises an absorbent pad **20** wherein the side flaps **40** are folded during use prior to an insult of fluid on the dry absorbent pad **20**. As illustrated in **Figure 11**, the garment-facing surface **35** of each side flap **40** folds back onto itself, forming an accordion pleated structure **53**. The body-facing region **55** on each folded side flap **40** has gasketing characteristics, maintaining a gasketing contact relationship between the absorbent pad **20** and the body of the wearer. The side flaps **40** act as a barrier, preventing fluid escaping off the side edges **28** and **29** of the absorbent pad **20** during heavy or multiple insults of fluid.

After at least an initial insult of fluid, the absorbent assembly **32** (or absorbent core **33**) shifts as the fluid is absorbed. The side flaps **40** at least partially unfold to accommodate the shifting of the absorbent assembly **32** (or absorbent core **33**), thereby maintaining the gasketing contact relationship between the body of the wearer and the absorbent pad **20**. The side flaps **40** may completely unfold under multiple insults or heavier loading of fluid, continuing to maintain the gasketing contact relationship between the body of the wearer and the absorbent pad **20**. As the weight of the fluid causes the absorbent pad **20** to move downward, the side flaps **40** unfold, maintaining the gasketing contact relationship between the pad **20** and the wearer's body.

In other embodiments, the component (not shown) having gasketing characteristics may comprise any flexible materials along the longitudinal side edges **28** and **29** of the pad **20**. The flexible material may also comprise elasticized flaps, non-recovery stretchable material, or a coil of material that unwraps with the weight of the absorbent assembly **32** or absorbent core **33**. Each component includes a proximal edge **48** disposed on the garment-facing surface **35** of the absorbent pad **20** and a distal edge **49** disposed outwardly of the proximal edge **48** defining a free edge **51** of the component. Prior to the insult of fluid, the component is folded, or accordion pleated while maintaining a gasketing contact relationship between the body of the wearer and the absorbent pad **20**. The component forms a barrier having gasketing characteristics that retains the fluid of each insult until the fluid has been absorbed.

After at least an initial insult of fluid, the absorbent assembly **32** (or absorbent core **33**) shifts as the fluid is absorbed. The component at least partially unfolds to accommodate the shifting of the absorbent assembly **32** (or absorbent core **33**), thereby maintaining the gasketing contact relationship between the body of the wearer and the absorbent pad **20**. The component may completely unfold under multiple insults or heavier loading of fluid, continuing to maintain the gasketing contact relationship between the body of the wearer and the absorbent pad **20**.

The present invention provides an absorbent pad **20** having gasketing characteristics, thereby maintaining contact between the absorbent pad **20** and the wearer's body whether the pad **20** is dry or has been insulted with fluid. The effectiveness of the side flaps **40** or gasketing components is observed in video data and image capture photography with the use of the OLYMPUS® video imagescope (VIS) system which

includes a video analyzer. VIS uses a small video camera in a flexible insertion tube with various lens options to facilitate imaging.

During a study of commercially available absorbent pads during simulated use, it
5 was discovered that the thickness of the absorbent assembly or absorbent core consisting of cellulose fibers and super absorbent materials increases with fluid instillation. This change reduced the effective gasketing characteristics of the commercially available absorbent pads. In some of the absorbent pads, the absorbent assembly or core swells upward, creating a bulge in the center of the absorbent assembly or core, and pushes the
10 gasketing component away from the body of the wearer. In other instances, the weight of the fluid pulls the absorbent pads away from the wearer's body, breaking the gasketing contact between the wearer's body and the gasketing component.

VIS showed the folded or accordion pleated structure **53** of the side flaps **40** of the
15 dry, prior to an insult of fluid, absorbent pad **20**. VIS also showed the gasketing contact between the wearer's body and the dry absorbent pad **20**. The body-facing region **55**, defined by the folding of the side flaps **40**, provides a gasketing contact between the wearer's body and the absorbent pad **20**. After at least one insult of fluid, the side flaps **40** at least partially unfolded while maintaining a gasketing contact relationship between
20 the wearer's body and the absorbent pad **20**. After multiple insults of fluid or heavier loading, the side flaps **40** completely unfolded while continuing to maintain the gasketing contact between the wearer's body and the pad **20**. The configuration of the unfolded side flaps **40** is illustrated in **Figs. 3 and 8**.

25 The position and configuration of the side flaps **40** of the pad **20** during use prior to, during, and after multiple insults of fluid were observed using the VIS technology. Each wearer wore body hugging tights. A body hugging mesh panty containing a wetting apparatus was placed over the tights. The wetting apparatus is designed to simulate an insult of fluid such as occurs during an incontinence episode. The wearer then put on an
30 appropriate sized pair of Fruit of the Loom® panty styled underwear including a properly placed absorbent pad **20**.

The pad **20** was marked with a permanent marker, for example a SANFORD® Ultra Fine Point SHARPIE®, to aid visual differentiation of specific components of the pad **20**.
35 Another color was used to mark the free edge **51**. Another color was used to mark the longitudinal side edges **57** and **58** of the absorbent assembly **32** (or absorbent core **33**) of

the pad **20**. Another color was used to mark the inner fold edge **59** defined by the folded side flap **40**. (See **Figure 11**). The longitudinal and transverse axes **22** and **24** were marked in different colors as well. All of these components of the absorbent pad **20** could have been marked with the same color, however, it would be more difficult to differentiate the components during the simulated use tests. To further aid visualization in the tests, tights and underwear of different colors, differing from the colors of the markers as well as from each other, were used.

A lighted fiber-optic camera (VIS) was then inserted between the tights and the absorbent pad **20**, allowing visualization of the pad **20** during the simulated use tests. The design of the VIS system has minimal or no intrusive effects on the function of the pad and the simulated incontinence tests.

The observations of the dry pad **20** showed that the side flaps **40** defined a folded or accordion pleated structure **53** during use. It was further observed that the body-facing region **55** of the accordion pleated structure **53** maintained a gasketing contact relationship between the wearer's body and the absorbent pad **20**.

Insults of saline of varying amounts were added to the absorbent pad **20** at various time intervals through the wetting apparatus. The saline was blue-tinged to improve the conditions under which the observations were taken. The side flaps **40** and the gasketing characteristics of the pad **20** were observed both during each insults and after each insult. After at least one insult, the side flaps **40** at least partially unfolded while maintaining the gasketing contact relationship between the wearer's body and the absorbent pad **20**. The amount of unfolding displayed by the side flaps **40** depended on the number and/or volume of the insults introduced to the absorbent pad **20**. In several instances, under multiple insults or heavy loading of the absorbent pad **20**, the side flaps **40** unfolded completely while continuing to maintain the gasketing contact relationship between the wearer's body and the absorbent pad **20**.

30

In one embodiment of the present invention, the absorbent pad **20**, defining longitudinal and transverse axes **22** and **24**, comprises a backsheet layer **30**; a fluid permeable topsheet layer **31** superposed on the backsheet layer **30**; an absorbent assembly **32** sandwiched between the backsheet layer **30** and the topsheet layer **31**; and, side flaps **40** disposed transversely outward of the absorbent assembly **32**. Each side flap **40** comprising an elastic member **46** that is at least partly out of the plane of the

35

absorbent assembly **32** when the absorbent pad **20** is in a generally flat position. In addition, each side flap **40** maintains a gasketing contact relationship with a wearer's body during use. The absorbent pad **20** may have a Gurley stiffness greater than about 2000 milligrams.

5

The side flaps **40** of the absorbent pad **20** are folded during use prior to an insult of fluid on the absorbent pad **20**. The side flaps **40** at least partially unfold during use after at least one insult of fluid on the absorbent pad **20**. The side flaps **40** may unfold completely during use after at least one insult of fluid on the absorbent pad **20**.

10

In another embodiment of the present invention, the absorbent pad **20**, defining longitudinal and transverse axes **22** and **24**, comprises a backsheet layer **30**; a fluid permeable topsheet layer **31** superposed on the backsheet layer **30**; a single layer absorbent core **33** sandwiched between the backsheet layer **30** and the topsheet layer **31**; and, side flaps **40** disposed transversely outward of the absorbent core **33**. Each side flap **40** comprising an elastic member **46** that is at least partly out of the plane of the absorbent core **33** when the absorbent pad **20** is in a generally flat position. In addition, each side flap **40** maintains a gasketing contact relationship with a wearer's body during use. The absorbent pad **20** may have a Gurley stiffness of at least about 800 milligrams.

20

The side flaps **40** of the absorbent pad **20** are folded during use prior to an insult of fluid on the absorbent pad **20**. The side flaps **40** at least partially unfold during use after at least one insult of fluid on the absorbent pad **20**. The side flaps **40** may unfold completely during use after at least one insult of fluid on the absorbent pad **20**.

25

In another embodiment of the present invention, the absorbent pad **20**, defining a longitudinal axis **22**, a transverse axis **24**, opposite longitudinal end edges **26** and **27**, and opposite longitudinal side edges **28** and **29** extending between the longitudinal end edges **26** and **27**. The absorbent pad **20** comprises a backsheet layer **30**; a fluid permeable topsheet layer **31** superposed on the backsheet layer **30**; an absorbent assembly **32** sandwiched between the backsheet layer **30** and the topsheet layer **31**; side flaps **40** disposed transversely outward of the absorbent assembly **32** comprising an proximal edge **48**, a distal edge **49**, a body-facing surface **34** which is configured to be in a contacting relationship with a wearer's body during use, at least one elastic member **46** having opposite active ends **54** that are longitudinally spaced from the respective longitudinal end edges **26** and **27** of the absorbent pad **20**, wherein the proximal edge **48**

30

35

is attached to the longitudinal side edges **28** and **29** of the absorbent pad **20**, and at least adjacent the elastic members **46**, the distal edge **49** remains unattached from the longitudinal side edges **28** and **29** of the absorbent pad **20**; and garment attachment means disposed on the backsheet layer **30** remote from the absorbent assembly **32**, the
5 garment attachment means positioned and extends longitudinally outward of the active ends **54** of the elastic members **46**. The absorbent pad **20** has an Effective Elastic Value of at least 30 millimeters.

The side flaps **40** of the absorbent pad **20** are folded during use prior to an insult of
10 fluid on the absorbent pad **20**. The side flaps **40** at least partially unfold during use after at least one insult of fluid on the absorbent pad **20**. The side flaps **40** may unfold completely during use after at least one insult of fluid on the absorbent pad **20**.

In another embodiment of the present invention, the absorbent pad **20**, defining a
15 longitudinal axis **22**, a transverse axis **24**, opposite longitudinal end edges **26** and **27**, and opposite longitudinal side edges **28** and **29** extending between the longitudinal end edges **26** and **27**. The absorbent pad **20** comprises a backsheet layer **30**; a fluid permeable topsheet layer **31** superposed on the backsheet layer **30**; a single layer absorbent core **33** sandwiched between the backsheet layer **30** and the topsheet layer **31**; side flaps **40**
20 disposed transversely outward of the absorbent core **33** comprising an proximal edge **48**, a distal edge **49**, a body-facing surface **34** which is configured to be in a contacting relationship with a wearer's body during use, at least one elastic member **46** having opposite active ends **54** that are longitudinally spaced from the respective longitudinal end edges **26** and **27** of the absorbent pad **20**, wherein the proximal edge **48** is attached to the
25 longitudinal side edges **28** and **29** of the absorbent pad **20**, and at least adjacent to the elastic members **46**, the distal edge **49** remains unattached from the longitudinal side edges **28** and **29** of the absorbent pad **20**; and garment attachment means disposed on the backsheet layer **30** remote from the absorbent core **33**, the garment attachment means positioned and extends longitudinally outward of the active ends **54** of the elastic
30 members **46**. The absorbent pad **20** has an Effective Elastic Value of at least 30 millimeters.

The side flaps **40** of the absorbent pad **20** are folded during use prior to an insult of
fluid on the absorbent pad **20**. The side flaps **40** at least partially unfold during use after
35 at least one insult of fluid on the absorbent pad **20**. The side flaps **40** may unfold completely during use after at least one insult of fluid on the absorbent pad **20**.

Examples

5 Having thus described the present invention and the process for making it, a series of examples were prepared to give a more detailed understanding of the invention. The particular amounts, proportions, compositions and parameters are meant to be exemplary, and are not intended to specifically limit the scope of the invention.

Example 1

10 An absorbent pad of the type illustrated in **Figures 1 - 5** was constructed and is designated as Example 1 in TABLE 1. The absorbent pad comprised a backsheet layer formed of a 0.028 mm. thick polyethylene film. An absorbent assembly of the type illustrated in Figures 6 was disposed on the backsheet layer, and a topsheet layer was disposed on the absorbent assembly. The topsheet layer comprised a surfactant treated spunbond web of side-by-side bicomponent filaments with 50 percent polyethylene and 50 percent polypropylene having a basis weight of about 20 gsm.

20 The absorbent assembly comprised a fluid storage layer and an acquisition/distribution layer. The storage layer was formed of an air-laid mixture of 470 gsm wood pulp fibers and 305 gsm high-absorbency materials that was sandwiched between a pair of 19 gsm cellulose tissues. The storage layer was embossed using a matched male/male embossing roll. The acquisition/distribution layer comprised a through-air bonded carded web composed of a blend of 40 percent 6 denier polyester fibers and 60 percent 3 denier polypropylene/polyethylene side-by-side bicomponent fibers, with an overall basis weight of about 120 gsm. The storage layer was hourglass shaped and the acquisition/distribution layer was rectangular.

30 The absorbent pad included side flaps that extended along the full length of the side edges of the pad. The longitudinal ends of the side flaps were folded and bonded to themselves. As shown in **Figures 1 - 5**, the side flaps were formed by lateral portions of both the backsheet layer and the topsheet layer, and by portions of two separate side panel members. The side panel members comprised a high loft, fuzzy nonwoven spunbond made of side-by-side bicomponent filaments of 50 percent polyethylene and 50

percent polypropylene. The side panel members included folded regions that enclosed two 720 denier elastomeric threads. The threads were stretched 160 percent of their original length and operatively joined to the side panel members with a hot melt adhesive over a distance of 16.5 cm.

5

The Gurley stiffness values of ten absorbent pads were measured. The pads had an average Gurley stiffness of 1438 mg. at one end, with a standard deviation of 222 mg., and 1336 mg. at the other end, with a standard deviation of 269 mg.

10

Example 2

Another absorbent pad designated as Example 2 in TABLE 1 was constructed. The absorbent pad was similar to that of Example 1 except that the storage layer was embossed more aggressively.

15

The Gurley stiffness values of ten absorbent pads of Example 2 were measured. The pads had an average Gurley stiffness of 4,525 mg. at one end, with a standard deviation of 1372 mg., and 3,253 mg. at the other end, with a standard deviation of 1145 mg.

20

For purposes of comparison, absorbent pads designated Examples 3 - 11 were purchased and their Effective Elastic Value and the Elastic Out Of The Plane Value were measured.

25

Example 3 (Comparative)

POISE Extra Plus Absorbency pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin on October 15, 1996.

30

Example 4 (Comparative)

KOTEX Secure Hold Maxi pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin on October 15, 1996.

35

Example 5 (Comparative)

KOTEX Curved Maxi pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin on October 15, 1996.

5

Example 6 (Comparative)

ATTENDS guards manufactured by The Procter & Gamble Company were purchased in or near Appleton, Wisconsin on October 15, 1996.

10

Example 7 (Comparative)

ATTENDS pads manufactured by The Procter & Gamble Company were purchased in or near Appleton, Wisconsin on October 15, 1996.

15

Example 8 (Comparative)

ALWAYS Curved Maxi with side gathers manufactured by The Procter & Gamble Company were purchased in or near Appleton, Wisconsin on October 15, 1996.

20

Example 9 (Comparative)

CERTINA Super pads were purchased in Europe in 1995. The Effective Elastic Value and the Elastic Out Of The Plane Value are based on measurements from 6 rather than 15 pads.

25

30

Example 10 (Comparative)

SERENITY STAYFREE Extra Plus pads manufactured by Johnson & Johnson were purchased in or near Appleton, Wisconsin on October 15, 1996.

35

Example 11 (Comparative)

CUC Ultra Plus pads were purchased in or near Appleton, Wisconsin on October 15, 1996.

5

The Effective Elastic Value and the Elastic Out Of The Plane Value were measured for each of Examples 1 - 11. The results are presented in TABLE 1 below. For Examples 1 and 2, the pads were folded and stored in a compressed condition for 10 days in order to simulate commercial packaging conditions. The elastics of the Example 1 and Example 2 pads were completely out of the plane of the absorbent assembly. For the pads of Examples 3 - 11, only the pad of Example 9 was at least partly out of the plane of the absorbent assembly. For the pads of Examples 1 - 11, only the pads of the present invention (Examples 1 and 2) consistently kept the elastic members out of the plane of the absorbent assembly or absorbent core.

15

TABLE 1

Example	<u>Effective Elastic Value</u>		<u>Elastic Out Of The Plane Value</u>	
	<u>Average</u>	<u>Std. Dev.</u>	<u>Average</u>	<u>Std. Dev.</u>
1	36.9	9.6	4.5	2.1
2	58.5	8.2	9.6	2.5
3	5.3	5.8	-8.3	1.2
4	5.5	1.8	-6.7	1.0
5	3.7	2.2	-8.5	1.1
6	8.5	2.7	-7.6	1.4
7	6.5	4.5	-5.7	1.3
8	8.8	4.7	-5.4	1.1
9	25.8	2.0	-0.3	0.8
10	8.0	3.6	-4.9	1.0
11	8.5	2.7	-4.7	1.6

35

Example 12

An absorbent pad of the type illustrated in **Figures 1 - 5** was constructed and is designated Example 12. The absorbent pad comprised a backsheet layer formed of a 0.028 mm. thick polyethylene film. An absorbent assembly of the type illustrated in **Figures 6** was disposed on the backsheet layer, and a topsheet layer was disposed on the absorbent assembly. The topsheet layer comprised a surfactant treated spunbond web of side-by-side bicomponent filaments with 50 percent polyethylene and 50 percent polypropylene having a basis weight of about 20 gsm.

The absorbent assembly comprised a fluid storage layer and an acquisition/distribution layer. The storage layer was formed of an air-laid mixture of 470 gsm wood pulp fibers and 305 gsm high-absorbency materials that was sandwiched between a pair of 19 gsm cellulose tissues. The storage layer was embossed using a matched male/male embossing roll. The acquisition/distribution layer comprised a through-air bonded carded web composed of a blend of 40 percent 6 denier polyester fibers and 60 percent 3 denier polypropylene/polyethylene side-by-side bicomponent fibers, with an overall basis weight of about 120 gsm. The storage layer was hourglass shaped and the acquisition/distribution layer was rectangular.

The absorbent pad included side flaps that extended along the full length of the side edges of the pad. The longitudinal ends of the side flaps were folded and bonded to themselves. As shown in **Figures 1 - 5**, the side flaps were formed by lateral portions of both the backsheet layer and the topsheet layer, and by portions of two separate side panel members. The side panel members comprised a high loft, fuzzy nonwoven spunbond made of side-by-side bicomponent filaments of 50 percent polyethylene and 50 percent polypropylene. The side panel members included folded regions that enclosed two 720 denier elastomeric threads. The threads were stretched 160 percent of their original length and operatively joined to the side panel members with a hot melt adhesive over a distance of 16.5 cm.

The position and configuration of the side flaps the pad were observed prior to, during, and after multiple insults of fluid. The gasketing characteristics of the pad were observed using VIS technology.

For purposes of comparison, absorbent pads designated as Examples 13 - 16 were purchased and their gasketing characteristics were tested.

5 **Example 13 (Comparative)**

POISE Extra Plus Absorbency pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin in 1996. The product, designed with less retention capacity than the present invention, demonstrated good gasketing
10 characteristics in the dry product. However, as the product absorbed the fluid insults, the gasketing characteristics were reduced.

15

Example 14 (Comparative)

ATTENDS Ultra Care normal absorbency pads were purchased in Europe in 1996. The product did not exhibit a complete gasketing contact with the wearer's body in the dry
20 or wet product.

Example 15 (Comparative)

25 SERENITY STAYFREE Extra Plus pads manufactured by Johnson & Johnson were purchased in or near Neenah, Wisconsin in 1997. The dry product exhibited only minimal gasketing characteristics. The absorbent material bunches up during wear, defining crests and valleys of absorbent material. As the absorbent material is insulted with fluid, the fluid insulting the crests simply ran over the elastic sides of the pad. In addition, the
30 absorption of fluid caused the absorbent material to swell upwards, resulting in the elastic sides being pushed further away from the wearer's body.

Example 16 (Comparative)

SERENITY Super Plus Guards manufactured by Johnson & Johnson were purchased in or near Neenah, Wisconsin in 1997. The dry product exhibited good gasketing characteristics. However, when insulted with fluid, the absorbent material swelled, pushing the thermal formed foam sides away from the wearer's body, breaking the gasketing contact.

Example 17

An absorbent pad of the type illustrated in **Figures 1 - 5** was constructed and is designated as Example 17 in TABLE 2. The absorbent pad comprised a backsheet layer formed of a 0.028 mm. thick polyethylene film. An absorbent assembly of the type illustrated in Figures 6 was disposed on the backsheet layer, and a topsheet layer was disposed on the absorbent assembly. The topsheet layer comprised a surfactant treated spunbond web of side-by-side bicomponent filaments with 50 percent polyethylene and 50 percent polypropylene having a basis weight of about 20 gsm.

The absorbent assembly comprised a fluid storage layer and an acquisition/distribution layer. The storage layer was formed of an air-laid mixture of 470 gsm wood pulp fibers and 305 gsm high-absorbency materials that was sandwiched between a pair of 19 gsm cellulose tissues. The storage layer was embossed using a matched male/male embossing roll. The acquisition/distribution layer comprised a through-air bonded carded web composed of a blend of 40 percent 6 denier polyester fibers and 60 percent 3 denier polypropylene/polyethylene side-by-side bicomponent fibers, with an overall basis weight of about 120 gsm. The storage layer was hourglass shaped and the acquisition/distribution layer was rectangular.

The absorbent pad included side flaps that extended along the full length of the side edges of the pad. The longitudinal ends of the side flaps were folded and bonded to themselves. As shown in **Figures 1 - 5**, the side flaps were formed by lateral portions of both the backsheet layer and the topsheet layer, and by portions of two separate side panel members. The side panel members comprised a high loft, fuzzy nonwoven spunbond made of side-by-side bicomponent filaments of 50 percent polyethylene and 50 percent polypropylene. The side panel members included folded regions that enclosed

two 720 denier elastomeric threads. The threads were stretched 160 percent of their original length and operatively joined to the side panel members with a hot melt adhesive over a distance of 16.5 cm.

5 The Gurley stiffness values of ten absorbent pads were measured. The pads had an average Gurley stiffness of 1438 mg. at one end, with a standard deviation of 222 mg., and 1336 mg. at the other end, with a standard deviation of 269 mg.

10 **Example 18**

 Another absorbent pad designated as Example 18 in TABLE 2 was constructed. The absorbent pad was similar to that of Example 17 except that the storage layer was embossed more aggressively.

15

 The Gurley stiffness values of ten absorbent pads of Example 18 were measured. The pads had an average Gurley stiffness of 4,525 mg. at one end, with a standard deviation of 1372 mg., and 3,253 mg. at the other end, with a standard deviation of 1145 mg.

20

 For purposes of comparison, absorbent pads designated Examples 19 - 26 were purchased and their Gibbosity Factor was measured.

25 **Example 19 (Comparative)**

 POISE Extra Plus Absorbency pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin on October 15, 1996.

30

Example 20 (Comparative)

 CERTINA Super pads were purchased in Europe in 1995. The Effective Elastic Value and the Elastic Out Of The Plane Value are based on measurements from 6 rather
35 than 15 pads.

Example 21 (Comparative)

5 SERENITY STAYFREE Extra Plus pads manufactured by Johnson & Johnson were purchased in or near Appleton, Wisconsin on October 15, 1996.

Example 22 (Comparative)

10 POISE Extra Absorbency pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin in 1996.

15 **Example 23 (Comparative)**

POISE Regular Absorbency pads manufactured by Kimberly-Clark Corporation were purchased in or near Appleton, Wisconsin in 1996.

20

Example 24 (Comparative)

ATTENDS Regular absorbency pads manufactured by The Procter & Gamble Company were purchased in or near Appleton, Wisconsin in 1996.

25

Example 25 (Comparative)

30 ATTENDS Super absorbency pads manufactured by The Procter & Gamble Company were purchased in or near Appleton, Wisconsin in 1996.

Example 26 (Comparative)

35 OSCO Super As Long absorbency pads were purchased in or near Appleton, Wisconsin in 1996.

The Gibbosity factor was measured for each of the Examples 17 - 26. The results are presented in TABLE 2 below. For the pads of Examples 17 - 26, only the absorbent pads of the present invention (Examples 17 and 18) exhibited a gibbosity factor such that the elastic members of the absorbent pad interacted with the end of the absorbent pad and not simply causing bunching or wrinkling the absorbent assembly or core of the absorbent pad.

TABLE 2

Gibbosity Factor

Example	#Peaks/field (2 1/4")	Mean Ht. (mm)	Gibbosity (mm)
17	11	0.82	9.02
18	0.8	0.66	0.528
19	76	1.51	114.76
20	35	1.64	57.4
21	22	1.03	22.66
22	55	1.07	58.85
23	70	1.03	72.1
24	24	0.79	18.96
25	38	1.05	39.9
26	55	0.98	53.9

It will be appreciated that the foregoing examples, given for purposes of illustration, are not to be construed as limiting the scope of this invention, which is defined by the following claims and all equivalents thereto.

CLAIMS

We claim:

1. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a liquid permeable topsheet layer superposed on the backsheet layer;

5 an absorbent assembly sandwiched between the backsheet layer and the topsheet layer; and

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position;

10 the absorbent pad having a Gurley stiffness of greater than about 2000 milligrams.

2. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a liquid permeable topsheet layer superposed on the backsheet layer;

an absorbent assembly sandwiched between the backsheet layer and the topsheet layer;

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member having opposite active ends that are longitudinally spaced
10 from the respective longitudinal end edges of the absorbent pad; and

garment attachment means disposed on the backsheet layer remote from the absorbent assembly, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having an Effective Elastic Value of at least 30 millimeters.

3. The absorbent pad of Claim 1, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent assembly, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

4. The absorbent pad of Claim 1 or 3, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

5. The absorbent pad of Claim 1 or 2, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.

6. The absorbent pad of Claim 1 or 2, wherein the elastic members are completely out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position.

7. The absorbent pad of Claim 6, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.

8. The absorbent pad of Claim 6, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.

9. The absorbent pad of Claim 1 or 2, wherein the absorbent assembly has a thickness dimension of less than about 20 millimeters.

10. The absorbent pad of Claim 9, wherein the absorbent assembly has a thickness dimension of less than about 10 millimeters.

11. The absorbent pad of Claim 1 or 2, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent assembly, the elastic members operatively joined to the side panel members.

12. The absorbent pad of Claim 1 or 2, wherein the garment attachment means comprises an adhesive.

13. The absorbent pad of Claim 1, 2 or 3, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

14. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a fluid permeable topsheet layer superposed on the backsheet layer;

5 a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer; and

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position;

10 the absorbent pad having a Gurley stiffness of greater than about 800 milligrams.

15. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a fluid permeable topsheet layer superposed on the backsheet layer;

a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer;

10 side flaps disposed transversely outward of the absorbent core, each side flap comprising an elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad; and

garment attachment means disposed on the backsheet layer remote from the absorbent core, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having an Effective Elastic Value of at least 30 millimeters.

16. The absorbent pad of Claim 14, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent core, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

17. The absorbent pad of Claim 14 or 16, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

18. The absorbent pad of Claim 14 or 15, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.

19. The absorbent pad of Claim 14 or 15, wherein the elastic members are completely out of the plane of the absorbent core when the absorbent pad is in a generally flat position.

20. The absorbent pad of Claim 19, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.

21. The absorbent pad of Claim 19, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.

22. The absorbent pad of Claim 14 or 15, wherein the absorbent core has a thickness dimension of less than about 20 millimeters.

23. The absorbent pad of Claim 22, wherein the absorbent core has a thickness dimension of less than about 10 millimeters.

24. The absorbent pad of Claim 14 or 15, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent core, the elastic members operatively joined to the side panel members.

25. The absorbent pad of Claim 14 or 15, wherein the garment attachment means comprises an adhesive.

26. The absorbent pad of Claim 14, 15 or 16, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

27. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a fluid permeable topsheet layer superposed on the backsheet layer;

5 an absorbent assembly sandwiched between the backsheet layer and the topsheet layer; and,

10 side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position and wherein each side flap maintains a gasketing contact relationship with a wearer's body during use.

28. The absorbent pad of Claim 27, wherein the absorbent pad has a Gurley stiffness of greater than about 2000 milligrams.

29. The absorbent pad of Claim 27, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

30. The absorbent pad of Claim 27, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

31. The absorbent pad of Claim 27, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

32. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a fluid permeable topsheet layer superposed on the backsheet layer;

an absorbent assembly sandwiched between the backsheet layer and the topsheet layer;

10 side flaps disposed transversely outward of the absorbent assembly comprising an proximal edge, a distal edge, a body-facing surface which is configured to be in a contacting relationship with a wearer's body during use, at least one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad, wherein the proximal edge is attached to the longitudinal side edges of the absorbent pad and the distal edge remains unattached from the longitudinal side edges of the absorbent pad; and

15 garment attachment means disposed on the backsheet layer remote from the absorbent assembly, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having an Effective Elastic Value of at least 30 millimeters.

33. The absorbent pad of Claim 32, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

34. The absorbent pad of Claim 32, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

35. The absorbent pad of Claim 32, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

36. The absorbent pad of Claim 27, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent assembly, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

- 37.** The absorbent pad of Claim 29, 30, 31, or 36, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.
- 38.** The absorbent pad of Claim 29, 30, 31, 33, 34, or 35, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.
- 39.** The absorbent pad of Claim 29, 30, 31, 33, 34, or 35, wherein the elastic members are completely out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position.
- 40.** The absorbent pad of Claim 39, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.
- 41.** The absorbent pad of Claim 39, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.
- 42.** The absorbent pad of Claim 29, 30, 31, 33, 34, or 35, wherein the absorbent assembly has a thickness dimension of less than about 20 millimeters.
- 43.** The absorbent pad of Claim 42, wherein the absorbent assembly has a thickness dimension of less than about 10 millimeters.
- 44.** The absorbent pad of Claim 29, 30, 31, 33, 34, or 35, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent assembly, the elastic members operatively joined to the side panel members.
- 45.** The absorbent pad of Claim 29, 30, 31, 33, 34, or 35, wherein the garment attachment means comprises an adhesive.

46. The absorbent pad of Claim 29, 30, 31, 33, 34, 35 or 36, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

47. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a fluid permeable topsheet layer superposed on the backsheet layer;

5 a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer; and,

side flaps disposed transversely outward of the absorbent core, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position and wherein each side flap
10 maintains a gasketing contact relationship with a wearer's body during use.

48. The absorbent pad of Claim 47, wherein the absorbent pad has a Gurley stiffness of at least about 800 milligrams.

49. The absorbent pad of Claim 47, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

50. The absorbent pad of Claim 47, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

51. The absorbent pad of Claim 47, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

52. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a fluid permeable topsheet layer superposed on the backsheet layer;

an single layer absorbent core sandwiched between the backsheet layer and the topsheet layer;

side flaps disposed transversely outward of the absorbent core comprising an proximal edge, a distal edge, a body-facing surface which is configured to be in a gasketing contact relationship with a wearer's body during use, at least one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad, wherein the proximal edge is attached to the longitudinal side edges of the absorbent pad and the distal edge remains unattached from the longitudinal side edges of the absorbent pad; and

garment attachment means disposed on the backsheet layer remote from the absorbent core, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having an Effective Elastic Value of at least 30 millimeters.

53. The absorbent pad of Claim 52, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

54. The absorbent pad of Claim 52, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

55. The absorbent pad of Claim 52, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

56. The absorbent pad of Claim 47, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

garment attachment adhesive is disposed on the backsheet layer remote from the absorbent assembly, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

57. The absorbent pad of Claim 49, 50, 51, or 56, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

- 58.** The absorbent pad of Claim 49, 50, 51, 53, 54, or 55, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.
- 59.** The absorbent pad of Claim 49, 50, 51, 53, 54, or 56, wherein the elastic members are completely out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position.
- 60.** The absorbent pad of Claim 59, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.
- 61.** The absorbent pad of Claim 59, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.
- 62.** The absorbent pad of Claim 49, 50, 51, 53, 54, or 55, wherein the absorbent assembly has a thickness dimension of less than about 20 millimeters.
- 63.** The absorbent pad of Claim 62, wherein the absorbent assembly has a thickness dimension of less than about 10 millimeters.
- 64.** The absorbent pad of Claim 49, 50, 51, 53, 54, or 55, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent assembly, the elastic members operatively joined to the side panel members.
- 65.** The absorbent pad of Claim 49, 50, 51, 53, 54, or 55, wherein the garment attachment means comprises an adhesive.
- 66.** The absorbent pad of Claim 49, 50, 51, 53, 54, 55, or 56, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

67. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a liquid permeable topsheet layer superposed on the backsheet layer;

5 an absorbent assembly sandwiched between the backsheet layer and the topsheet layer; and

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position;

10 the absorbent pad having a Gibbosity Factor of less than about 18.

68. The absorbent pad of Claim 67, wherein the absorbent pad has a Gurley stiffness of greater than about 2000 milligrams.

69. The absorbent pad of Claim 67 or 68, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

70. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a liquid permeable topsheet layer superposed on the backsheet layer;

an absorbent assembly sandwiched between the backsheet layer and the topsheet layer;

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad; and

10 garment attachment means disposed on the backsheet layer remote from the absorbent assembly, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having a Gibbosity Factor of less than about 18.

71. The absorbent pad of Claim 67, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

- 5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent assembly, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

72. The absorbent pad of Claim 70 or 71, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

73. The absorbent pad of Claim 70, 71, or 72, wherein the absorbent pad has a Gurley Stiffness of greater than about 2000 milligrams.

74. The absorbent pad of Claim 67, 70, or 71, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.

75. The absorbent pad of Claim 67 or 70, wherein the elastic members are completely out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position.

76. The absorbent pad of Claim 75, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.

77. The absorbent pad of Claim 75, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 100 millimeters.

78. The absorbent pad of Claim 67 or 70, wherein the absorbent assembly has a thickness dimension of less than about 20 millimeters.

79. The absorbent pad of Claim 78, wherein the absorbent assembly has a thickness dimension of less than about 10 millimeters.

80. The absorbent pad of Claim 67 or 70, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent assembly, the elastic members operatively joined to the side panel members.

81. The absorbent pad of Claim 67 or 70, wherein the garment attachment means comprises an adhesive.

82. The absorbent pad of Claim 67, 70 or 71, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

83. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a fluid permeable topsheet layer superposed on the backsheet layer;

5 a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer; and

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position;

10 the absorbent pad having a Gibbosity Factor of less than about 18.

84. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a fluid permeable topsheet layer superposed on the backsheet layer;

a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer;

side flaps disposed transversely outward of the absorbent core, each side flap comprising an elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad; and

10

garment attachment means disposed on the backsheet layer remote from the absorbent core, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having a Gibbosity Factor of less than about 18.

85. The absorbent pad of Claim 83, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent core, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

86. The absorbent pad of Claim 83, 84, or 85, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

87. The absorbent pad of Claim 83, 84, or 85, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.

88. The absorbent pad of Claim 83, 84, or 85, wherein the absorbent pad has a Gurley Stiffness of greater than about 800 milligrams.

89. The absorbent pad of Claim 83 or 84, wherein the elastic members are completely out of the plane of the absorbent core when the absorbent pad is in a generally flat position.

90. The absorbent pad of Claim 89, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.

91. The absorbent pad of Claim 89, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.

92. The absorbent pad of Claim 83 or 84, wherein the absorbent core has a thickness dimension of less than about 20 millimeters.

93. The absorbent pad of Claim 92, wherein the absorbent core has a thickness dimension of less than about 10 millimeters.

94. The absorbent pad of Claim 83 or 84, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent core, the elastic members operatively joined to the side panel members.

95. The absorbent pad of Claim 83 or 84, wherein the garment attachment means comprises an adhesive.

96. The absorbent pad of Claim 83, 84 or 85, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

97. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a fluid permeable topsheet layer superposed on the backsheet layer;

5 an absorbent assembly sandwiched between the backsheet layer and the topsheet layer; and,

side flaps disposed transversely outward of the absorbent assembly, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position and
10 wherein each side flap maintains a gasketing contact relationship with a wearer's body during use,

wherein the absorbent pad has a Gibbosity Factor of less than about 18.

98. The absorbent pad of Claim 97, wherein the absorbent pad has a Gurley stiffness of greater than about 2000 milligrams.

99. The absorbent pad of Claim 97, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

100. The absorbent pad of Claim 97, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

101. The absorbent pad of Claim 97, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

102. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a fluid permeable topsheet layer superposed on the backsheet layer;

an absorbent assembly sandwiched between the backsheet layer and the topsheet layer;

side flaps disposed transversely outward of the absorbent assembly comprising an proximal edge, a distal edge, a body-facing surface which is configured to be in a contacting relationship with a wearer's body during use, at least one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad, wherein the proximal edge is attached to the longitudinal side edges of the absorbent pad and the distal edge remains unattached from the longitudinal side edges of the absorbent pad; and

15 garment attachment means disposed on the backsheet layer remote from the absorbent assembly, the garment attachment means positioned longitudinally outward of the active ends of the elastic members;

the absorbent pad having a Gibbosity Factor of less than about 18.

103. The absorbent pad of Claim 102, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

104. The absorbent pad of Claim 102, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

105. The absorbent pad of Claim 102, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

106. The absorbent pad of Claim 102, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

107. The absorbent pad of Claim 97, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent assembly, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

108. The absorbent pad of Claim 99, 100, 101, 102 or 107, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

109. The absorbent pad of Claim 99, 100, 101, 102, 104, 105, or 106, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.

110. The absorbent pad of Claim 99, 100, 101, 102, 104, 105, or 106, wherein the elastic members are completely out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position.

111. The absorbent pad of Claim 110, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.

112. The absorbent pad of Claim 110, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.

113. The absorbent pad of Claim 99, 100, 101, 104, 105, or 106, wherein the absorbent assembly has a thickness dimension of less than about 20 millimeters.

114. The absorbent pad of Claim 113, wherein the absorbent assembly has a thickness dimension of less than about 10 millimeters.

115. The absorbent pad of Claim 99, 100, 101, 104, 105, or 106, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent assembly, the elastic members operatively joined to the side panel members.

116. The absorbent pad of Claim 99, 100, 101, 104, 105, or 106, wherein the garment attachment means comprises an adhesive.

117. The absorbent pad of Claim 99, 100, 101, 104, 105, 106 or 107, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

118. An absorbent pad defining longitudinal and transverse axes, the absorbent pad comprising:

a backsheet layer;

a fluid permeable topsheet layer superposed on the backsheet layer;

5 a single layer absorbent core sandwiched between the backsheet layer and the topsheet layer; and,

side flaps disposed transversely outward of the absorbent core, each side flap comprising an elastic member that is at least partly out of the plane of the absorbent core when the absorbent pad is in a generally flat position and
10 wherein each side flap maintains a gasketing contact relationship with a wearer's body during use,

wherein the absorbent pad has a Gibbosity Factor of less than about 18.

119. The absorbent pad of Claim 118, wherein the absorbent pad has a Gurley stiffness of at least about 800 milligrams.

120. The absorbent pad of Claim 118, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

121. The absorbent pad of Claim 118, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

122. The absorbent pad of Claim 118, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

123. An absorbent pad defining a longitudinal axis, a transverse axis, opposite longitudinal end edges, and opposite longitudinal side edges extending between the longitudinal end edges, the absorbent pad comprising:

a backsheet layer;

5 a fluid permeable topsheet layer superposed on the backsheet layer;

an single layer absorbent core sandwiched between the backsheet layer and the topsheet layer;

side flaps disposed transversely outward of the absorbent core comprising an proximal edge, a distal edge, a body-facing surface which is configured to be in a gasketing contact relationship with a wearer's body during use, at least one elastic member having opposite active ends that are longitudinally spaced from the respective longitudinal end edges of the absorbent pad, wherein the proximal edge is attached to the longitudinal side edges of the absorbent pad and the distal edge remains unattached from the longitudinal side edges of the absorbent pad; and

15 garment attachment means disposed on the backsheet layer remote from the absorbent core, the garment attachment means positioned longitudinally outward of the active ends of the elastic members,
wherein the absorbent pad has a Gibbosity Factor of less than about 18.

124. The absorbent pad of Claim 123, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

125. The absorbent pad of Claim 123, wherein the side flaps are folded during use prior to an insult of fluid on the absorbent pad.

126. The absorbent pad of Claim 123, wherein the side flaps are at least partially unfolded during use after at least one insult of fluid on the absorbent pad.

127. The absorbent pad of Claim 123, wherein the side flaps are unfolded during use after at least one insult of fluid on the absorbent pad.

128. The absorbent pad of Claim 118, wherein:

the elastic members have opposite active ends that are longitudinally spaced from respective longitudinal end edges of the absorbent pad; and

5 garment attachment adhesive is disposed on the backsheet layer remote from the absorbent assembly, the garment attachment adhesive being positioned longitudinally outward of the active ends of the elastic members.

129. The absorbent pad of Claim 118, 120, 121, 122, or 128, wherein the absorbent pad has an Effective Elastic Value of at least 30 millimeters.

130. The absorbent pad of Claim 118, 120, 121, 122, 125, 126, or 127, wherein the absorbent pad has an Effective Elastic Value of at least about 40 millimeters.

131. The absorbent pad of Claim 118, 120, 121, 122, 125, 126, or 128, wherein the elastic members are completely out of the plane of the absorbent assembly when the absorbent pad is in a generally flat position.

132. The absorbent pad of Claim 123 or 131, wherein the elastic members have an Elastic Out Of The Plane Value of at least about 5 millimeters.

133. The absorbent pad of Claim 131, wherein the elastic members have an Elastic Out Of The Plane Value of from about 10 to about 30 millimeters.

- 134.** The absorbent pad of Claim 120, 121, 122, 125, 126, or 127, wherein the absorbent assembly has a thickness dimension of less than about 20 millimeters.
- 135.** The absorbent pad of Claim 134, wherein the absorbent assembly has a thickness dimension of less than about 10 millimeters.
- 136.** The absorbent pad of Claim 120, 121, 122, 125, 126, or 127, wherein the side flaps comprise a pair of nonwoven side panel members bonded to the backsheet and extending transversely outward of the absorbent assembly, the elastic members operatively joined to the side panel members.
- 137.** The absorbent pad of Claim 120, 121, 122, 125, 126, or 127, wherein the garment attachment means comprises an adhesive.
- 138.** The absorbent pad of Claim 120, 121, 122, 125, 126, 127, or 128, wherein the absorbent pad has a length dimension of from about 10 to about 40 centimeters and a width dimension of from about 3 to about 12 centimeters.

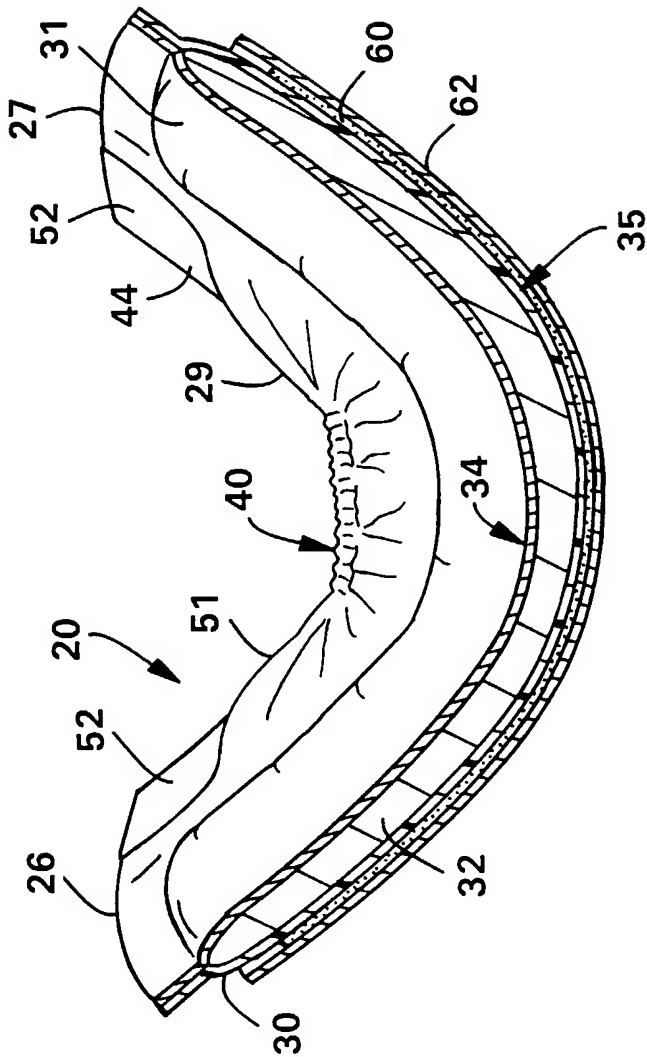


FIG. 2

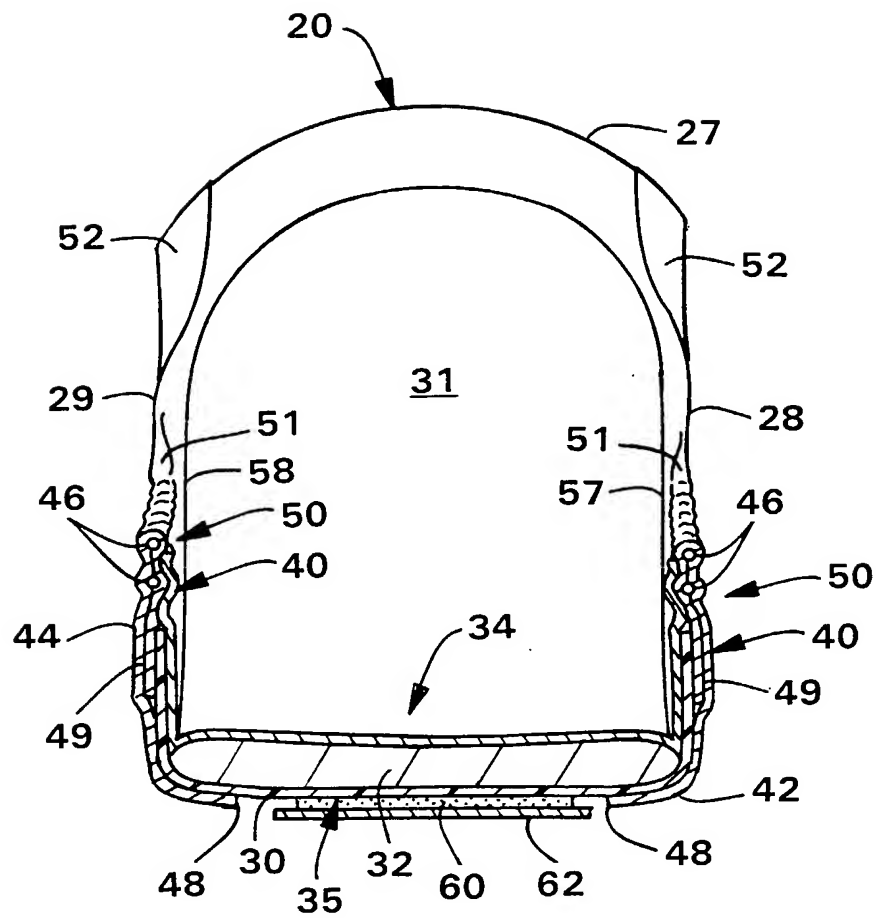


FIG. 3

4 / 13

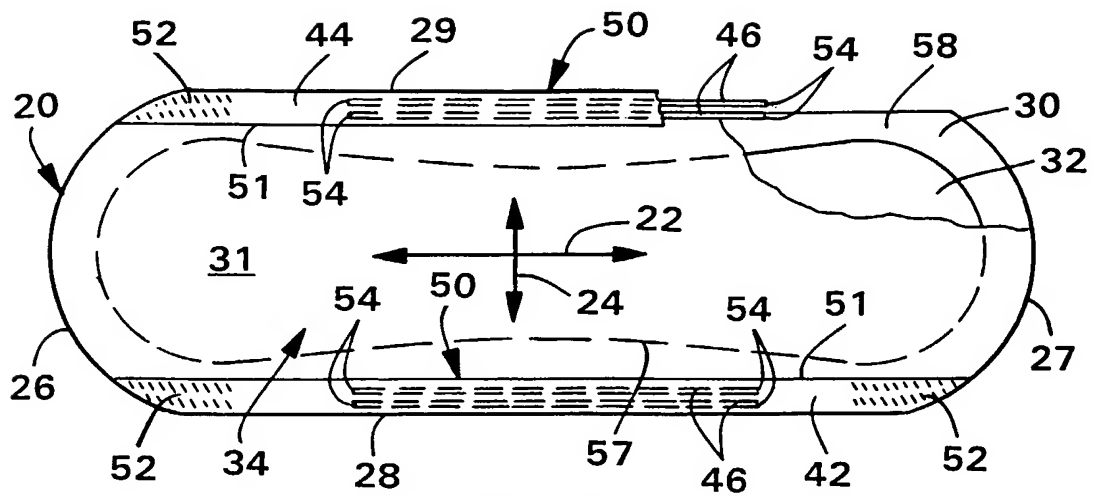


FIG. 4

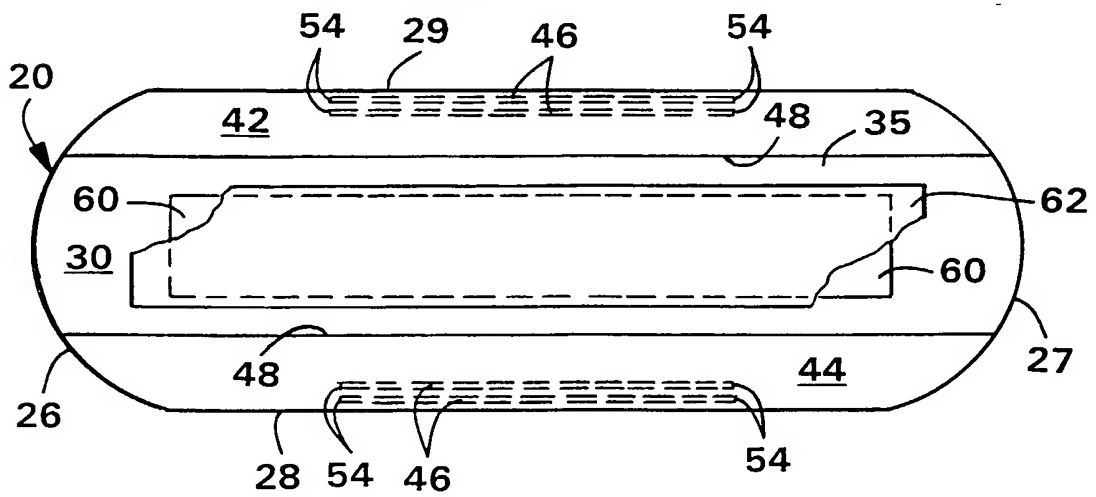


FIG. 5

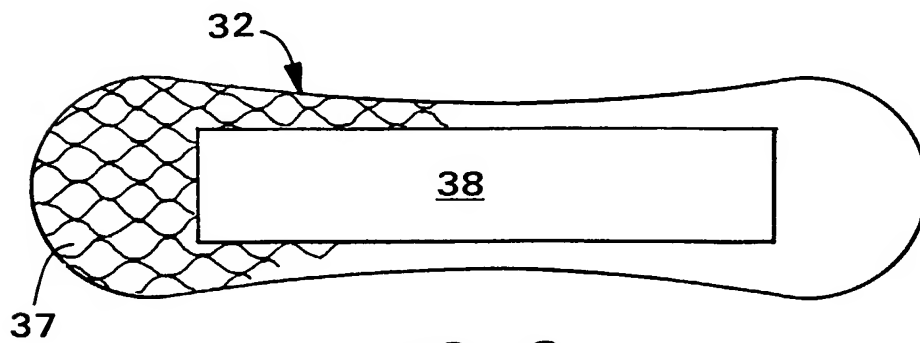


FIG. 6

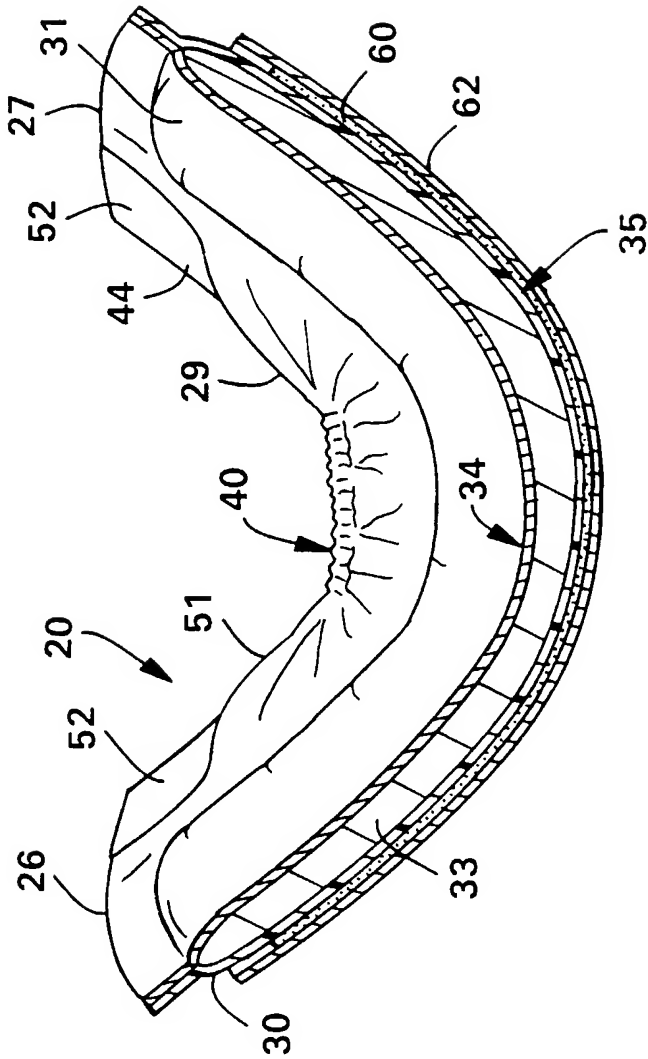


FIG. 7

6 / 13

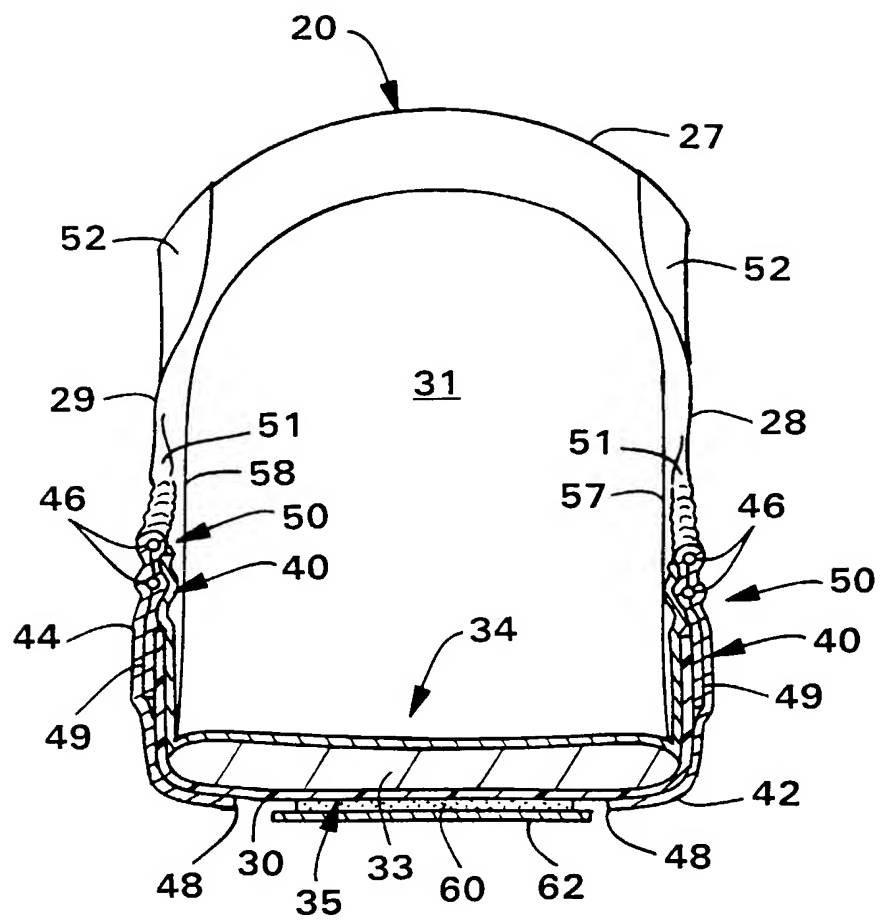


FIG. 8

7 / 13

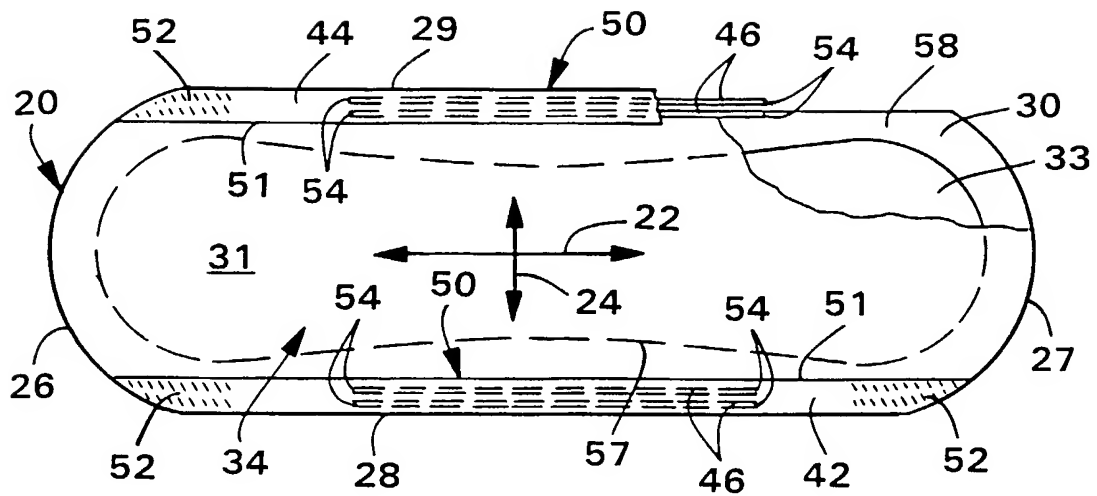


FIG. 9

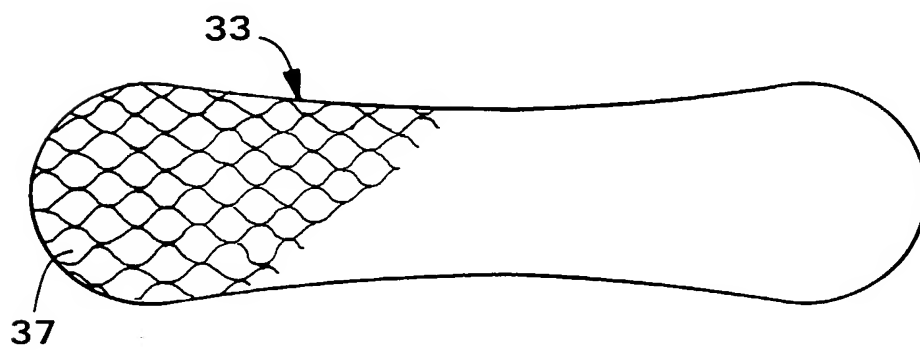


FIG. 10

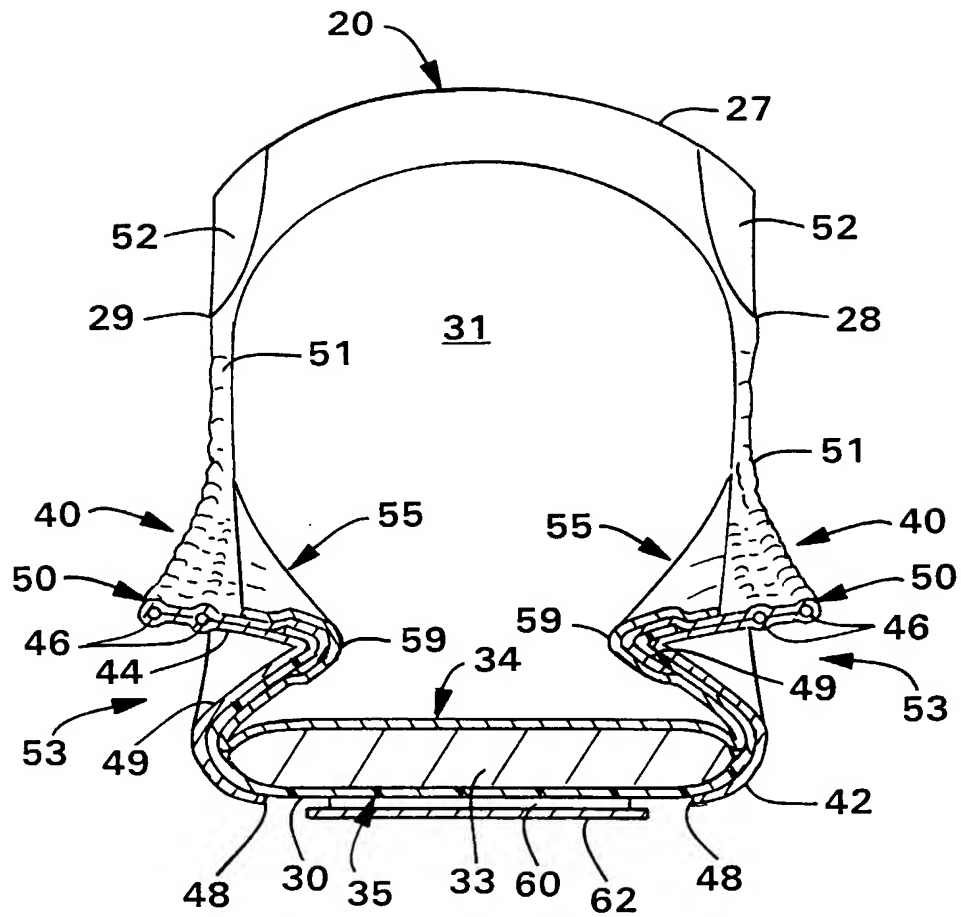
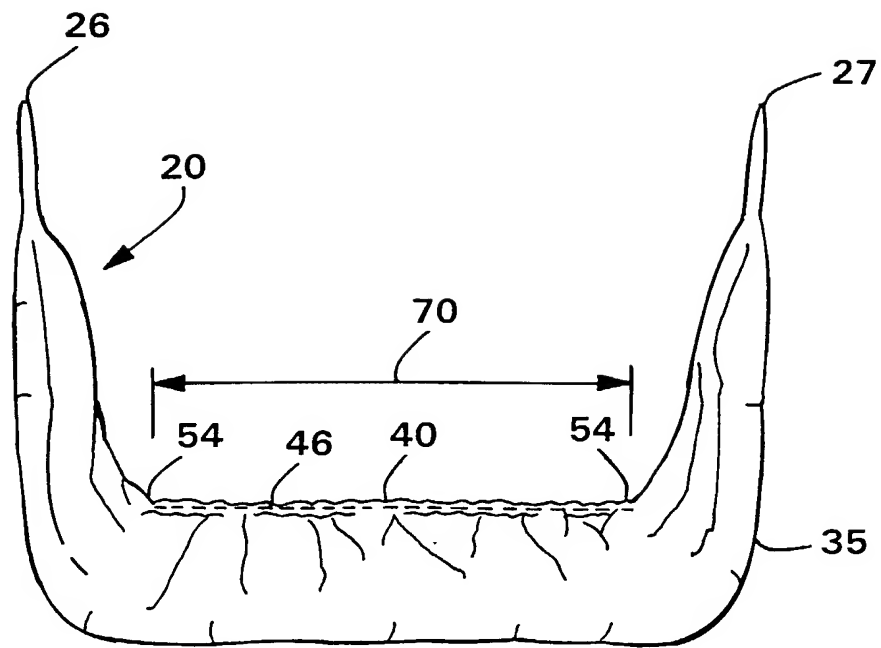


FIG. 11

**FIG. 12**

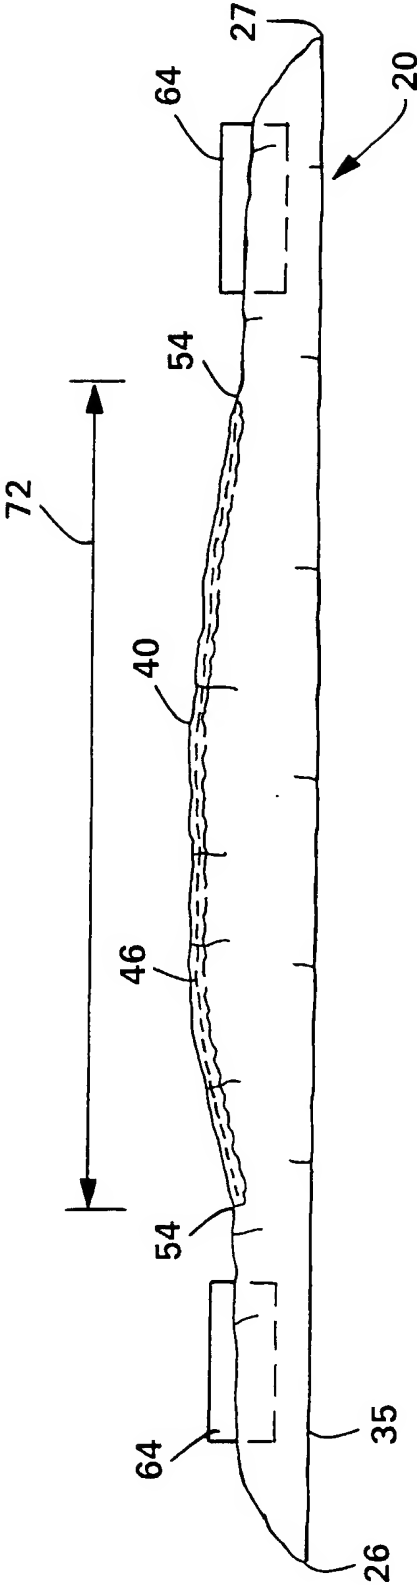


FIG. 13

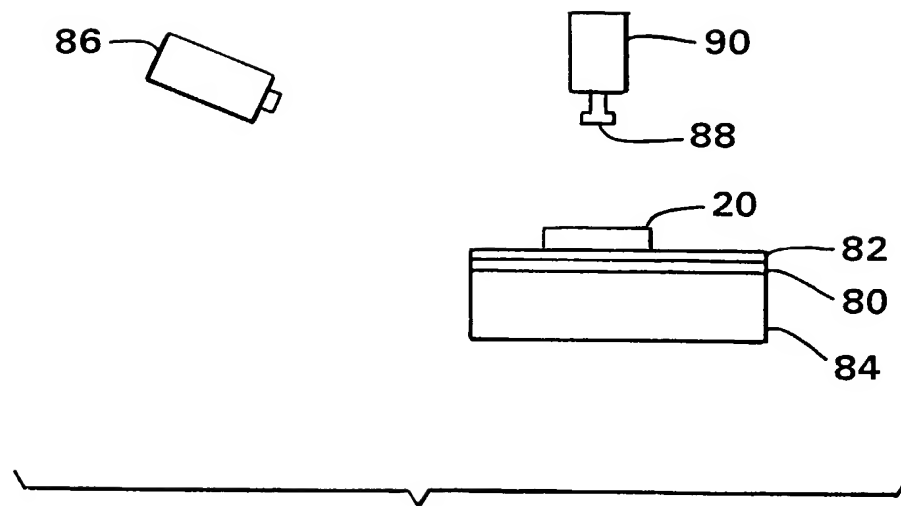


FIG. 14

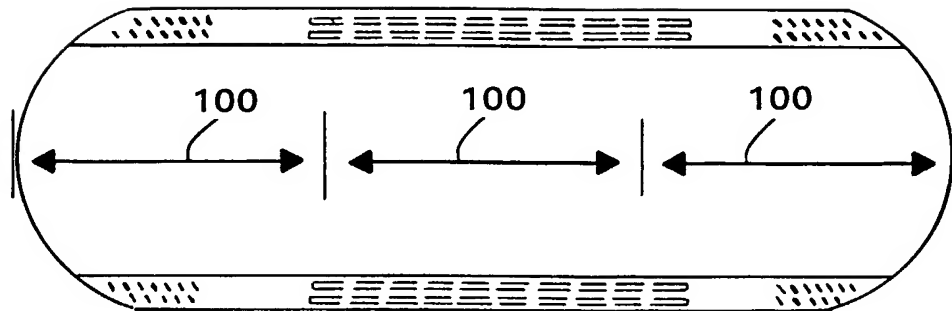


FIG. 15

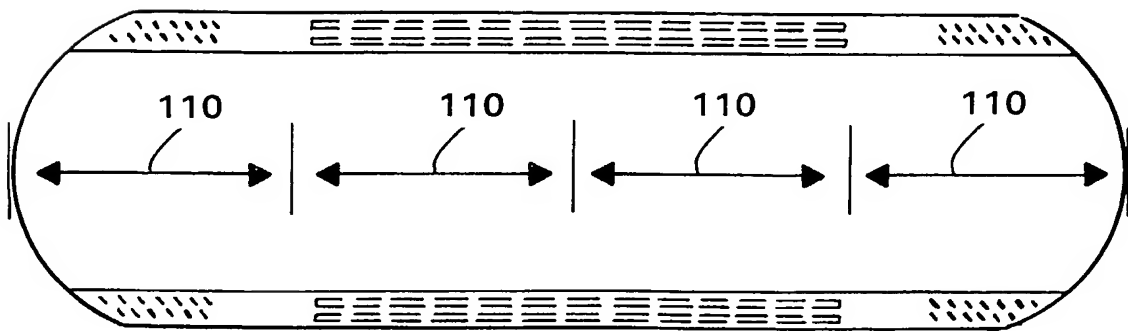


FIG. 16

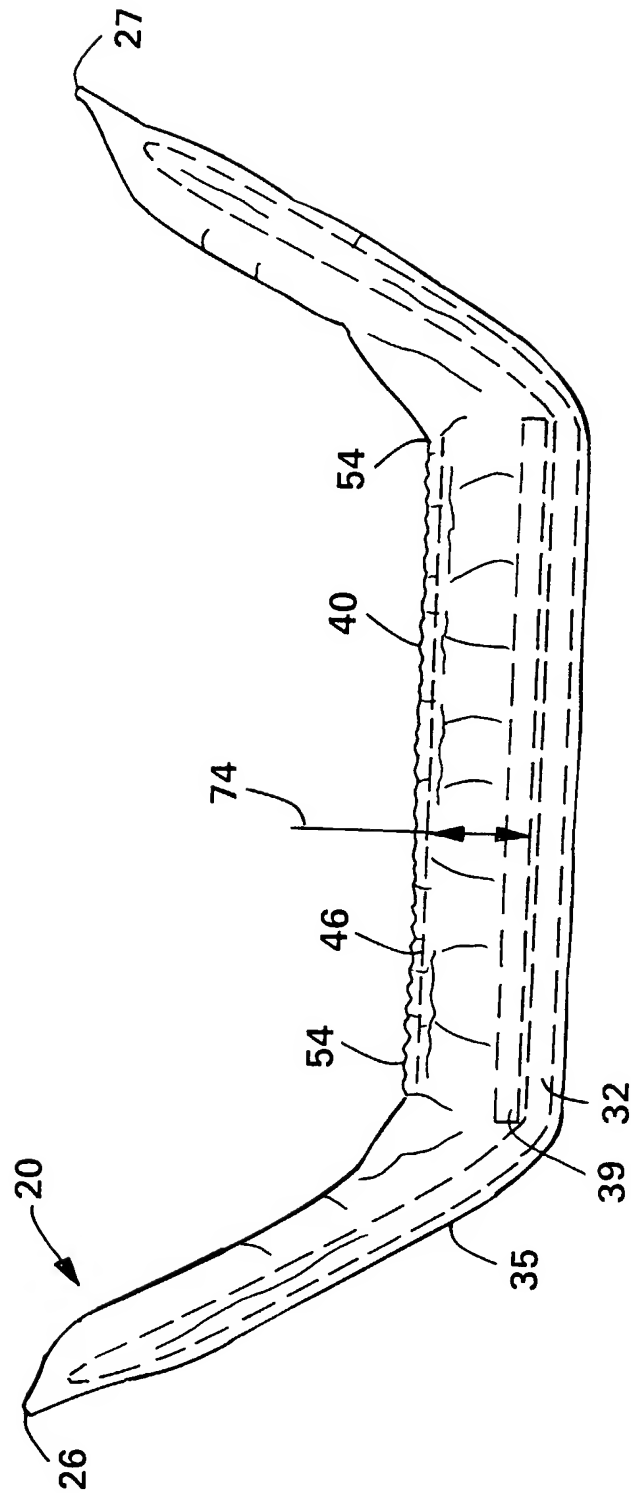


FIG. 17

INTERNATIONAL SEARCH REPORT

International application No

PCT/US 00/19932

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F13/15

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98 31320 A (KIMBERLY CLARK CO) 23 July 1998 (1998-07-23) claims 1-66; figures 1-11; examples 1,2,12 ---	1-138
X	WO 96 20679 A (KIMBERLY CLARK CO) 11 July 1996 (1996-07-11) claims 1-15; figures 1-3 page 10, line 20 -page 15, line 30 ---	1-138
X	US 5 032 121 A (MOKRY PATTI J) 16 July 1991 (1991-07-16) figures 1-4 column 5, line 54 -column 6, line 50 ---	1-138
X	GB 2 296 445 A (KAO CORP) 3 July 1996 (1996-07-03) claims 1-7; figures 1-33 ---	1-138
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

10 October 2000

Date of mailing of the international search report

03. 11. 2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Joly, F

INTERNATIONAL SEARCH REPORT

Internati application No
PCT/US 00/19932

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 442 223 A (CHICOPEE) 21 August 1991 (1991-08-21) claims 1-5; figures 1-8 ---	1-138
X	US 4 770 657 A (BASTEN JULIE T ET AL) 13 September 1988 (1988-09-13) claims 1-29; figures 1-9 -----	27,36, 67,68, 70,71, 73,75, 80,81, 97,98, 102,107, 110, 115-117

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 00/19932

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 1-138 partially searched
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 1-138 partially searched

Present claims 1-138 relate to a an absorbent pad having a backsheet, a topsheet, an absorbent assembly, and elasticized flaps defined by reference to a desirable characteristic or property, namely Gurley stiffness, Effective elastic value, Elastic out of the plane value, Gibbosity factor.

The claims cover all absorbent pads having this characteristic or property, whereas the application provides support within the meaning of Article 6 PCT and/or disclosure within the meaning of Article 5 PCT for only a very limited number of such absorbent pads. In the present case, the claims so lack support, and the application so lacks disclosure, that a meaningful search over the whole of the claimed scope is impossible. Independent of the above reasoning, the claims also lack clarity (Article 6 PCT). An attempt is made to define the absorbent pad by reference to a result to be achieved. Again, this lack of clarity in the present case is such as to render a meaningful search over the whole of the claimed scope impossible. Consequently, the search has been carried out for those parts of the claims which appear to be clear, supported and disclosed, namely those parts relating to the absorbent pads having side flaps with elastic members out of the plane of the absorbent assembly, and a cup shape. (see description : page 17 lines 26-34; page 24 lines 23-25; examples 1,2).

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internati

Application No

PCT/US 00/19932

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9831320 A	23-07-1998	AU 5823398 A EP 0957874 A ZA 9800071 A	07-08-1998 24-11-1999 07-07-1998
WO 9620679 A	11-07-1996	US 5613961 A AU 694916 B AU 4741696 A AU 713142 B AU 9138998 A CA 2209190 A CN 1175199 A CZ 9702042 A EP 0800373 A JP 11500328 T	25-03-1997 06-08-1998 24-07-1996 25-11-1999 14-01-1999 11-07-1996 04-03-1998 17-12-1997 15-10-1997 12-01-1999
US 5032121 A	16-07-1991	US 4944735 A CA 2019455 A AU 575622 B AU 3894585 A BR 8500769 A CA 1242301 A DE 3574823 D EP 0155515 A GB 2156681 A,B HK 82892 A IE 56338 B JP 2097685 C JP 5071262 B JP 60193461 A KR 9203407 B MX 162804 A ZA 8501030 A	31-07-1990 08-11-1991 04-08-1988 29-08-1985 08-10-1985 27-09-1988 25-01-1990 25-09-1985 16-10-1985 06-11-1992 19-06-1991 02-10-1996 06-10-1993 01-10-1985 30-04-1992 26-06-1991 25-09-1985
GB 2296445 A	03-07-1996	JP 2952175 B JP 8182702 A JP 8224271 A JP 8280735 A JP 8224272 A CN 1133168 A US 5921975 A	20-09-1999 16-07-1996 03-09-1996 29-10-1996 03-09-1996 16-10-1996 13-07-1999
EP 0442223 A	21-08-1991	AT 118338 T BR 9100116 A DE 69017001 D DE 69017001 T ES 2076341 T IE 70063 B ZA 9100244 A	15-03-1995 22-10-1991 23-03-1995 12-10-1995 01-11-1995 30-10-1996 30-09-1992
US 4770657 A	13-09-1988	AU 601186 B AU 7340787 A CA 1300809 A DE 3718076 A FR 2606276 A GB 2193100 A,B KR 9505341 B MX 167595 B	06-09-1990 03-12-1987 19-05-1992 10-12-1987 13-05-1988 03-02-1988 23-05-1995 30-03-1993